



# H.B. Fuller

## Product Catalogue


2018 Edition 1








- ◆ Adhesives
- ◆ Sealants
- ◆ Silicones
- ◆ Fillers

# Contents

## Adhesives

	Page
Max Bond™ Original Construction Adhesive	5
Max Bond™ Fast Grip Construction Adhesive	6
Max Bond™ Panel Grip Construction Adhesive	7 
Max Bond™ Rapid Cure Construction Adhesive	8
Max Bond™ Pro Gun Construction Adhesive	9
Max Bond™ PVA Woodworking Adhesive	10
FulaPrene™ 303 Adhesive Sealant	11
Spray Bond™ Permanent Spray Adhesive	12
Rapid Grip™ Liquid Contact Adhesive	12
Rocor™ Trade Stud Adhesive	13

## Sealants

	Page
Firesound™ Fire Rated Acoustic Sealant	15
FulaFlex™ 550 PU LM Polyurethane Sealant	16 
FulaFlex™ 570 FC PU Fast Cure Sealant	17 
FulaFlex™ 625 Hybrid Sealant	18 
FulaFlex™ 650FC Fast Cure Hybrid Sealant	19 
FulaSeal™ Construction Joint Sealant	20
FulaSeal™ PRO 840NS Cool Room Mastic	21 

## Silicones

	Page
FulaSeal PRO™ 300 Premium Grade Industrial	23
FulaSeal PRO™ 660 High Performance	24
FulaSeal PRO™ 260 Heat Resistant RTV	25
FulaSeal PRO™ 730 RTV Adhesive & Sealant	25
FulaSeal™ 700 Roof & Gutter	26
FulaSeal™ 705 Brick & Concrete	27
FulaSeal™ 710 Acetic Cure General Glazing	27
FulaSeal™ 720 Paintable	28
FulaSeal™ 740 Bathroom & Kitchen	28
FulaSeal™ 750 Multi Purpose	29
FulaSeal™ 760 Neutral Cure General Glazing	29
FulaSeal™ 770 Sanitary	30
FulaSeal™ 780 Plumbers	31
FulaSeal™ 790 Mirror & Metal	32

**H.B. Fuller Company Australia Pty Ltd**  
 16-22 Redgum Drive  
 Dandenong South Vic 3175  
**Ph:** 1800 423 855  
**Fx:** 1800 420 055  
**Em:** customer.service@hbfuller.com  
**Wb:** www.hbfuller.com.au

### LEGEND





– New product





– New to this catalogue





## Flooring

	Page
Floor Bond™ Sub-Floor Adhesive	<b>35</b> 
Floor Bond™ MC1 Moisture Control Barrier	<b>36</b> 
Floor Bond™ XMS Flooring Adhesive	<b>37</b>

## Multi Use

	Page
Tool Box™ Original MS Adhesive & Sealant	<b>43</b>
Tool Box™ High Tack MS Adhesive & Sealant	<b>44</b> 
Tool Box™ Invisible MS Adhesive & Sealant	<b>44</b> 
FulaSeal™ 701 Flexible Ultra Clear Sealant	<b>45</b>
FulaSeal™ 711 Copolymer Clear Sealant	<b>45</b>
Caulk in Colours™ Acrylic Sealant	<b>46</b>



## Trade

	Page
Fuller Trade™ Plumbing Silicone	<b>54</b> 
Fuller Trade™ Wet Area Silicone	<b>54</b> 
Fuller Trade™ Gap Filler	<b>55</b> 
Fuller Trade™ Construction Adhesive	<b>55</b> 


## Fire Rated

	Page
FulaFoam™ Fire Resistant Expanding Foam	<b>39</b>
Firesound™ Fire Rated Sealant	<b>40</b>

## Fillers

	Page
FulaFill™ Acrylic Gap Filler	<b>49</b>
FulaFoam™ Triple Expanding PU Foam	<b>50</b>
FulaFoam™ Pro Gun Applied Foam	<b>50</b>
FulaFoam™ Low Expansion PU Foam	<b>51</b> 
FulaFoam™ Cleaner	<b>51</b> 
FulaFill™ Building Filler	<b>52</b>
FulaFill™ Heavy Duty Crack & Hole Filler	<b>53</b>

## Other

	Page
Accessories	<b>56</b> 
Joint Configuration	<b>58</b>
Product Selection Chart	<b>60</b>

# Adhesives

H.B. Fuller offer a comprehensive range of durable adhesives, proven to work on Australian building sites just as hard as you do. Whether you're framing a house, bonding laminates or fixing plasterboard, there's a quality H.B. Fuller adhesive that will help you get the job done.







## Max Bond™ Original Construction Adhesive

Max Bond™ Original Construction Adhesive is a synthetic, rubber based adhesive designed primarily for the installation of flooring and wall panels. Max Bond™ Original Construction Adhesive is also ideal for bonding most common construction materials such as metal, timber and concrete.






### Key Benefits

- ✓ Bridges small gaps, effective when used on uneven surfaces
- ✓ Reduces squeaking associated with nail ride in floors
- ✓ Multi purpose
- ✓ Repositionable for up to 20 minutes after application
- ✓ Water resistant
- ✓ High bond strength and heat resistance

### Uses

- ✓ Installing particle board, fibre cement, plasterboard, plywood and strip flooring to joists
- ✓ Bonding cement sheet and plaster board to timber and metal studs
- ✓ Skirting boards, architraves and trims to walls
- ✓ Installing timber wall panelling to timber and metal studs

Specifications
<b>Cured State</b> Rigid - Minimal flexibility
<b>Typical Film Thickness</b> N/A - applied in beads up to 12mm in diameter
<b>Skin Time</b> 2 - 5 minutes
<b>Cure Time</b> Variable dependant on conditions
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Solvent based rubber
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Max Bond™ Original Construction Adhesive 320g Cartridge</b> Resource Code: 6004134011	tan	20
 <b>Max Bond™ Original Construction Adhesive 900g Cartridge</b> Resource Code: 6004134049	tan	12
 <b>Max Bond™ Original Construction Adhesive 600ml Sausage</b> Resource Code: 6004134133	tan	15
 <b>Max Bond™ Original Construction Adhesive Value Pack 3x 320g Cartridges</b> Resource Code: 4146264260	tan	8
 <b>Max Bond™ Original Construction Adhesive Tradies Bucket 20x 320g Cartridges</b> Resource Code: 4146264094	tan	1

Compatible Substrates
✓ Concrete
✓ Cement sheeting
✓ Masonry
✓ Metal
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Plasterboard
✓ Timber
✓ Fibreglass
✓ Plywood
✓ Particleboard
✓ Ceramic
✓ Glass



## Max Bond™ Fast Grip (Water Based) Adhesive

Max Bond™ Fast Grip is a water based, premium grade, multi purpose construction adhesive that is easy to use and provides a strong initial grab. Max Bond™ Fast Grip reduces squeaks in the flooring system and cures to give high bond strength. Max Bond™ Fast Grip is ideal for bonding parquetry to floors and subfloors and for bonding timber strip flooring that will be sanded and finished after installation.







### Key Benefits

- ✓ Water based, high bond strength and heat resistance when cured
- ✓ Versatile
- ✓ Fast initial grab
- ✓ Low VOC
- ✓ Low odour
- ✓ Meets AS 2329, bridges gaps up to 5mm
- ✓ Non-flammable and solvent free
- ✓ Reduces squeaks in floors

### Uses

- ✓ Bonding panelling to framing e.g. cement sheet, plywood, plasterboard
- ✓ Bonding subfloors to joists e.g. particleboard
- ✓ Bonding strip flooring and parquetry to subfloor and concrete slabs

Specifications
<b>Cured State</b> Rigid - Slightly flexible
<b>Typical Film Thickness</b> N/A - applied in beads up to 12mm in diameter
<b>Skin Time</b> 20 minutes
<b>Cure Time</b> Variable dependant on conditions
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Acrylic water based
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Max Bond™ Fast Grip Adhesive 420g Cartridge</b> Resource Code: 6020684010	 pale brown	20
 <b>Max Bond™ Fast Grip Adhesive 600ml Sausage</b> Resource Code: 4145534133	 pale brown	15
 <b>Max Bond™ Fast Grip Adhesive 1.5kg Concorde</b> Resource Code: 6025984134	 white	10

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Timber</li> <li>✓ Plywood</li> <li>✓ Particleboard</li> <li>✓ Concrete</li> <li>✓ Cement sheeting</li> <li>✓ Plasterboard</li> <li>✓ Ceramic</li> <li>✓ Polystyrene</li> </ul>



## Max Bond™ Panel Grip Adhesive



Max Bond™ Panel Grip Adhesive is a high strength, fast grab, neoprene rubber-based construction adhesive with exceptional wet grab strength, as well as exhibiting high initial bond strength when used in contact bonding method. It is ideally suited to bonding general construction materials including timber, plasterboard, concrete and metals.

### Key Benefits

- ✓ No run or drip of adhesive – even in overhead applications
- ✓ Exceptional wet-grab strength
- ✓ Suitable for a wide range of general purpose construction materials
- ✓ High bond strength
- ✓ Suitable for interior/exterior use
- ✓ Suitable for use with damp timber

### Uses

- ✓ Ideal for vertical and overhead applications where instant grab and a strong bond is required
- ✓ Installing panelling and fixtures in office or shopfitting applications
- ✓ Bonding skirting boards and architraves in building construction
- ✓ General building and construction applications, including those with difficult to bond substrates that require fast grab and a strong bond

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Cured State</b> Rigid - Minimal flexibility	 <b>Max Bond™ Panel Grip Adhesive 280g Cartridge</b> Resource Code: 7193214431	 pale yellow	20	<ul style="list-style-type: none"> <li>✓ Concrete</li> <li>✓ Cement sheeting</li> <li>✓ Masonry inc. brick</li> <li>✓ Metal</li> <li>✓ Steel inc stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Aluminium</li> <li>✓ Plasterboard</li> <li>✓ Timber</li> <li>✓ Fibreglass</li> <li>✓ Particleboard</li> <li>✓ Ceramic</li> <li>✓ Many plastics (pre-test)</li> <li>✓ Glass</li> </ul>
<b>Typical Film Thickness</b> N/A - applied in beads up to 12mm in diameter				
<b>Skin Time</b> 1 - 5 minutes				
<b>Cure Time</b> Variable dependant on conditions				
<b>Area</b> Interior/exterior				
<b>Product Chemistry</b> Solvent based rubber				
<b>Refer to TDS for additional technical information.</b>				



## Max Bond™ Rapid Cure PU Adhesive



Max Bond™ Rapid Cure is a rigid/hard set polyurethane for use where strong, stress resistant bonding is required. Waterproof to D4 classification makes it suitable for exterior applications. Max Bond™ Rapid Cure needs only one hour clamping times in most conditions.

### Key Benefits

- ✓ Rapid cure – one hour clamping time
- ✓ Water resistance – interior and exterior (D4 class)
- ✓ Bonds to most substrates
- ✓ Will not allow joints to move or flex
- ✓ Foams slightly if not clamped, bond strength significantly improves when clamped

### Uses

- ✓ Joinery and cabinet making where rigid bonding is required
- ✓ Pergola and decking construction
- ✓ Bonding carpet grip strips to floors and subfloors – especially to concrete when unable to nail
- ✓ Bonding where fast cure is required
- ✓ Green star building suitable (solvent free)

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Cured State</b> Rigid	 <b>Max Bond™ Rapid Cure Adhesive 310ml Cartridge</b> Resource Code: 7060944088	 translucent	12	<ul style="list-style-type: none"> <li>✓ Timber</li> <li>✓ Concrete</li> <li>✓ Steel inc. stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Metal</li> <li>✓ Cement sheeting</li> <li>✓ Particleboard</li> <li>✓ Plasterboard</li> <li>✓ Ceramic</li> <li>✓ Glass</li> </ul>
<b>Typical Film Thickness</b> N/A - applied in beads up to 12mm in diameter				
<b>Skin Time</b> 20 minutes				
<b>Cure Time</b> 1 hour clamping time, ultimate bond strength in 24 hours at 23°C, 50% RH				
<b>Area</b> Interior/exterior				
<b>Product Chemistry</b> Polyurethane				
<b>Refer to TDS for additional technical information.</b>				





## Max Bond™ Pro Gun Adhesive

Max Bond™ Pro Gun Adhesive is a ready-to-use polyurethane foam adhesive designed for bonding timber subfloors to timber joists. As the adhesive foam is applied with a gun applicator, the rate of application can be controlled and the canister can be sealed and re-used over a period of weeks.





### Key Benefits

- ✓ High yield/equivalent to 30 x 300g cartridges of construction adhesive
- ✓ Superior bonding strength
- ✓ Long open time
- ✓ Ozone safe
- ✓ Reduced waste
- ✓ Can be sealed and re-used
- ✓ Suited to wet, dry or green timber
- ✓ Designed to prevent squeaks and nail pop

### Uses

- ✓ Bonding of subfloor to timber joists
- ✓ Bonding of panelling to timber studs
- ✓ Refer to page 96 for Application Guns

Specifications
<b>Cured State</b> Rigid - Minimal flexibility
<b>Typical Film Thickness</b> N/A - applied in beads up to 12mm in diameter
<b>Skin Time</b> 20-30 minutes
<b>Cure Time</b> 80% cure in 2 hours, full cure in 7 days
<b>Area</b> Interior only
<b>Product Chemistry</b> Polyurethane
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Max Bond™ Pro Gun Adhesive 680g Can</b> Resource Code: 7319644238	 yellow	12
 <b>Max Bond™ Pro Gun Adhesive Economy Pack</b> <b>2x 680g Cans &amp; 1x Gun</b> Resource Code: 7319644252	 yellow	1

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Timber joists</li> <li>✓ Timber</li> <li>✓ Plywood</li> <li>✓ Concrete joists</li> <li>✓ Particleboard</li> <li>✓ Plasterboard</li> <li>✓ Polystyrene</li> </ul>



## Max Bond™ PVA Adhesive

Max Bond™ PVA is a professional quality, cross linking water resistant adhesive that resists soaking into end grain. The cross linking formulation assists in creating a stronger bond and reduces the chance of substrates separating over time under stress.









### Key Benefits

- ✓ Cross linking
- ✓ Fast setting – dries clear
- ✓ D3 standard water resistance
- ✓ Sandable
- ✓ High solids – high strength
- ✓ Water clean up

### Uses

- ✓ Joinery, cabinet furniture making
- ✓ Laminating and veneering
- ✓ Flooring
- ✓ Craft work

Specifications
<b>Cured State</b> Slightly flexible
<b>Typical Film Thickness</b> N/A
<b>Skin Time</b> 15 minutes (22°C, 60% RH)
<b>Cure Time</b> Full cure in 24 hours
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> PVA
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Max Bond™ PVA Adhesive 250ml Bottle</b> Resource Code: 6004924019	 white (dries clear)	15
 <b>Max Bond™ PVA Adhesive 500ml Bottle</b> Resource Code: 6004924021	 white (dries clear)	12
 <b>Max Bond™ PVA Adhesive 1L Bottle</b> Resource Code: 6004924018	 white (dries clear)	6
 <b>Max Bond™ PVA Adhesive 5L Bottle</b> Resource Code: 6004924022	 white (dries clear)	1

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Timber</li> <li>✓ Plywood</li> <li>✓ Particleboard</li> </ul>



## FulaPrene™ 303 Adhesive Sealant

FulaPrene™ 303 is a neoprene based adhesive sealant ideal for use in sealing lap joints in sheet metalwork. FulaPrene™ 303 will adhere to a wide range of substrates and can be used in numerous common construction applications.


### Key Benefits

- ✓ Seals water and airtight
- ✓ Paintable
- ✓ Interior/exterior
- ✓ Resistant to salt and chlorinated water
- ✓ Heat resistant to 80°C
- ✓ UV resistant
- ✓ Strong adhesion to a wide range of substrates

### Uses

- ✓ Sealing lap joints in box guttering
- ✓ Sealing air conditioning ducts
- ✓ Adhesive for fixing wall panels to studs, floor boards to joists
- ✓ Re-fixing loose ceramic tiles outside pools and in showers
- ✓ Sealing roof flashing

Specifications
<b>Cured State</b> Rigid - Minimal flexibility
<b>Typical Film Thickness</b> Gaps up to 2mm - applied in beads up to 10mm in diameter
<b>Skin Time</b> 2-5 minutes
<b>Cure Time</b> Variable dependant on conditions
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Solvent based rubber
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaPrene™ 303 Adhesive Sealant 300g Cartridge</b> Resource Code: 6003894033	 grey	20

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Concrete</li> <li>✓ Masonry</li> <li>✓ Ceramic</li> <li>✓ Brick</li> <li>✓ Glass</li> <li>✓ Fibreglass</li> <li>✓ Steel inc. stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Aluminium</li> <li>✓ Timber</li> <li>✓ Plywood</li> <li>✓ Plasterboard</li> <li>✓ Some plastics and rubber</li> <li>✓ Other common materials</li> </ul>

## Spray Bond™ Permanent Spray Adhesive

Spray Bond™ Permanent Spray Adhesive is a multi purpose spray glue for home, school and art and craft uses. Providing long lasting adhesion on many lightweight materials.



### Key Benefits

- ✓ Easy to spray application
- ✓ Fast drying
- ✓ Non staining; dries clear
- ✓ Multi purpose
- ✓ Can be used on rigid and flexible materials
- ✓ For permanent bonding

### Uses

- ✓ Mounting prints and photos
- ✓ Art design and displays
- ✓ Laminating and bonding craft materials such as fabric and paper

## Rapid Grip™ Liquid Contact Adhesive

Rapid Grip™ Liquid Contact Adhesive is a low viscosity, general purpose adhesive. It creates a fast strong bond with most substrates making it perfect for applying laminates.



### Key Benefits

- ✓ Spreads easily and uniformly
- ✓ Strong bond
- ✓ Fast bonding action
- ✓ Heat and water resistant
- ✓ Can be applied using brush spreader or roller

### Uses



- ✓ Bonding melamine to particleboard, plywood, MDF board and masonite
- ✓ Laminating a variety of materials
- ✓ General repairs





Specifications
<b>Cured State</b> Flexible
<b>Typical Film Thickness</b> <0.5mm
<b>Skin Time</b> 2 - 5 minutes
<b>Cure Time</b> Approx. 2 hours
<b>Area</b> Interior
<b>Product Chemistry</b> Chloroprene rubber based solvent
<b>Refer to TDS for additional technical information.</b>

Compatible Substrates
✓ Fabric
✓ Paper
✓ Cardboard
✓ Fabric
✓ Many rubber and plastic films (pre-test before use)

Specifications
<b>Cured State</b> Flexible
<b>Typical Film Thickness</b> 1mm
<b>Skin Time</b> 10 - 30 minutes
<b>Cure Time</b> 24 hours
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Solvent based rubber
<b>Refer to TDS for additional technical information.</b>

Compatible Substrates
✓ Fabric
✓ Metal
✓ Glass
✓ Plasterboard
✓ Linoleum
✓ Melamine board
✓ Timber inc. MDF
✓ Masonite
✓ Particleboard
✓ Polyurethane foam
✓ Cork

Available Products	Colour	Ctn Qty
 <b>Spray Bond™ Permanent 350g Can</b> Resource Code: 6004544056	 translucent	12

Available Products	Colour	Ctn Qty
 <b>Rapid Grip™ Liquid 1L Can</b> Resource Code: 6004214106 Note: 6 Pack R/C: 6004214012 available Q2 2018	 amber	8
 <b>Rapid Grip™ Liquid 4L Can</b> Resource Code: 6004214020	 amber	1

## ROCOR® Trade Stud Adhesive

ROCOR® Trade Stud Adhesive is a quality stud adhesive that meets the requirements of AS2753 for bonding plasterboard to metal internal framing or internal wooden studs.







### Key Benefits

- ✓ Complies with AS2753: adhesives - mastic - for bonding gypsum plaster lining to wood and metal framing members

### Uses

- ✓ Bonding plasterboard to timber or metal building framing
- ✓ Suitable for pine softwood framing
- ✓ Suitable for hardwood framing
- ✓ Suitable for timber framing (H1, H2, H2F)

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Cured State</b> Rigid - Slightly flexible	 <b>ROCOR® Stud Adhesive 5.2kg Pail</b> Resource Code: 6025061520	 aqua	1	<ul style="list-style-type: none"> <li>✓ Timber framing</li> <li>✓ Metal framing</li> <li>✓ Steel inc. stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Plasterboard</li> <li>✓ Particleboard</li> <li>✓ Plywood</li> </ul>
<b>Typical Film Thickness</b> N/A - applied in daubs	 <b>ROCOR® Stud Adhesive 600ml Sausage</b> Resource Code: 6025064132 Note: Made to Order	 aqua	15	
<b>Skin Time</b> 30 minutes				
<b>Cure Time</b> Variable dependant on conditions				
<b>Area</b> Interior only				
<b>Product Chemistry</b> Acrylic				
<b>Refer to TDS for additional technical information.</b>				



# Sealants

High quality multi-functional sealants that are easy to apply and compatible with a variety of construction substrates. Strong and flexible where necessary. Suitable for high traffic situations and major public works installations.





## Firesound™ Fire Rated Acoustic Sealant

Firesound™ is formulated primarily to perform as a barrier to the incursion of fire through expansion joints and wall penetrations such as pipes or cables. Firesound™ is also an effective acoustic sealant.

### Key Benefits









- ✓ Fire rating for gaps up to 50mm
- ✓ Up to 4 hour fire rating (AS1530.4)
- ✓ Excellent acoustic properties (STC 65)
- ✓ Good flexibility; +/- 20% joint movement capability
- ✓ Paintable
- ✓ Intumescent; expands when exposed to fire or extreme heat.

### Uses

- ✓ Sealing exterior and interior construction joints that are subject to movement (up to +/- 20%) in pre-cast concrete panels, block work, brickwork and fire-rated plasterboard
- ✓ Gaps around cables, metal pipes, conduits, busways and ducts that penetrate walls, floors and ceilings
- ✓ If joint movement is not required, Firesound can be used as a putty for filling holes in fire rated substrates
- ✓ Refer to page 58 for Recommended Joint Configurations

**Consult a fire engineer before use in a fire rated application**

Specifications
<b>Joint Width</b> 10mm x 10mm to 50mm x 25mm max
<b>Movement Capability (+/-)</b> 20%
<b>Skin Time</b> 15 minutes (25°C, 50% RH)
<b>Cure Time</b> Variable dependant on condition
<b>Paintable</b> Yes
<b>Area</b> Interior/exterior (protect from water until sufficiently cured)
<b>Fire Rated</b> Yes
<b>Product Chemistry</b> Acrylic
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Firesound™ Fire Rated Acoustic Sealant 450g Cartridge</b> Resource Code: 6025914042	 grey	20
 <b>Firesound™ Fire Rated Acoustic Sealant 600ml Sausage</b> Resource Code: 6026194133	 grey	15
 <b>Firesound™ Fire Rated Acoustic Sealant 600ml Sausage</b> Resource Code: 6011944132 Note: Made to Order	 white	15
 <b>Firesound™ Fire Rated Acoustic Sealant 10L Pail</b> Resource Code: 6011741513	 grey	1

Compatible Substrates
✓ Concrete
✓ Mortar
✓ Brick
✓ Masonry
✓ Fire rated plasterboard
✓ Aluminium
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Cable coverings (PVC)



## FulaFlex™ 550 PU LM Sealant

FulaFlex™ 550 PU LM is a one component moisture-curing low modulus Class A polyurethane sealant with excellent joint movement capabilities. It cures into a flexible, durable and weather resistant sealant and exhibits excellent adhesion to a wide range of substrates.







FulaFlex™ 550 PU LM satisfies the requirements for the Green Building Council of Australia (GBCA).

### Key Benefits

- ✓ Class A Joint Sealant
- ✓ Excellent flexibility (tested to  $\pm 35\%$  ISO 9047)
- ✓ High Performance - Excellent adhesion to many surfaces
- ✓ Excellent UV & weather resistance - can be used internally or externally
- ✓ Low modulus
- ✓ Paintable

### Uses

- ✓ Building joints with high movement
- ✓ Joints in pre-cast and tilt-up concrete elements
- ✓ Sealing roof and gutter joints.
- ✓ Connection joints between windows, door frames and walls
- ✓ Joints in brickwork, masonry and blockwork
- ✓ Perimeter fillets in waterproofing membrane systems

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Cured State</b> Highly flexible	 <b>FulaFlex™ 550 PU LM Sealant 600ml Sausage</b> Resource Code: 7156684237	 white	20	<div><div>✓</div>Concrete</div>
<b>Movement Capability (±)</b> 35%				<div><div>✓</div>Cement sheeting</div>
<b>Skin Time</b> 40 mins (23°C, 50% RH)	 <b>FulaFlex™ 550 PU LM Sealant 600ml Sausage</b> Resource Code: 7156704237	 grey	20	<div><div>✓</div>Ceramic</div>
<b>Cure Time</b> 3 - 4mm/day(23°C, 50% RH)				<div><div>✓</div>Masonry</div>
<b>Area</b> Interior/exterior	 <b>FulaFlex™ 550 PU LM Sealant 600ml Sausage</b> Resource Code: 7156674237	 black	20	<div><div>✓</div>Brick</div>
<b>Product Chemistry</b> Polyurethane				<div><div>✓</div>Plasterboard</div>
				<div><div>✓</div>Polystyrene</div>
				<div><div>✓</div>Metal</div>
				<div><div>✓</div>Steel inc. stainless</div>
				<div><div>✓</div>Zinc/galvanised steel</div>
				<div><div>✓</div>Aluminium (uncoated)*</div>
				<div><div>✓</div>Timber</div>
				<div><div>✓</div>Glass**</div>
				<div><div>✓</div>Many plastics (pre-test)</div>
				<div><div>*</div>pre-test coated aluminium</div>
				<div><div>**</div>not suitable for external glazing</div>
<b>Refer to TDS for additional technical information.</b>				



## FulaFlex™ 570FC PU Fast Cure Sealant

FulaFlex™ 570FC PU is a one-component moisture-curing fast-cure polyurethane adhesive/sealant developed for application to concrete, masonry and many construction related substrates. It has fast curing properties that develop into a strong, durable and weather resistant adhesive/sealant and exhibits excellent adhesion to a wide range of substrates. FulaFlex™ 570FC PU is low in VOC and satisfies the requirements for the Green Building Council of Australia (GBCA).



### Key Benefits

- ✓ Easy application, simple clean up – minimal mess
- ✓ Excellent adhesion to many surfaces
- ✓ Excellent resistance to ageing/weathering – suitable for interior and exterior use
- ✓ Paintable once cured
- ✓ Pick resistant sealant for use in public areas, shops, schools, prisons, etc.
- ✓ Low VOC – ca. 58g/L
- ✓ No shrinkage
- ✓ Bonding and sealing in one
- ✓ Non-sag
- ✓ Permanently elastic
- ✓ Excellent vibration and dampening properties

### Uses

- ✓ Sealing floor joints in concrete floors.
- ✓ Bonding and sealing fibre-cement panels.
- ✓ Sealing roof and gutter joints.
- ✓ Sealing pipe and duct penetrations in walls and floors.
- ✓ Joints around windows, door frames and walls
- ✓ Lap joints secured with fasteners.

Specifications
<b>Joint Width</b> 6-30mm
<b>Movement Capability (±)</b> 25%
<b>Service Temperature</b> -40°C to 90°C, with brief periods up to 120°C
<b>Skin Time</b> 50 mins (23°C, 50% RH)
<b>Cure Time</b> 4mm/day (23°C, 50% RH)
<b>Paintable</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Polyurethane
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaFlex™ 570FC PU Sealant 600ml Sausage</b> Resource Code: 7187204237	 grey	20

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Masonry</li> <li>✓ Concrete</li> <li>✓ Cement Sheetting</li> <li>✓ Brick</li> <li>✓ Ceramic</li> <li>✓ Polystyrene</li> <li>✓ Metal</li> <li>✓ Aluminium (Uncoated)*</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Plasterboard</li> <li>✓ Timber</li> <li>✓ Particleboard</li> <li>✓ Glass**</li> <li>✓ Many plastics (pre-test)</li> </ul>
<small>* pre-test coated aluminium</small> <small>** not suitable for external glazing</small>



## FulaFlex™ 625 Hybrid Sealant

FulaFlex™ 625 is a high performance, one part hybrid moisture curing construction sealant, which cures to form a seal that is tough, elastic and weatherproof with good chemical resistance. FulaFlex™ 625 is a low modulus product that is easy to apply and tool off, ideal in situations that may experience significant expansion and contraction.











### Key Benefits

- ✓ Isocyanate and solvent free
- ✓ Excellent flexibility  
(ISO 11600 Type F, Class 25, Subclass LM)
- ✓ UV & weather resistant - will not yellow
- ✓ Excellent long term chemical resistance to seawater, caustic solutions and cleaning agents
- ✓ Strong adhesion
- ✓ Will not shrink
- ✓ Does not sag or slump in joints up to 35mm
- ✓ Zero VOC
- ✓ Paintable with water-based high build, flexible emulsion coatings

### Uses

- ✓ Sealing expansion and control joints in tiling, walls, roofs, wall, door and window frame perimeters, cladding and brickwork.
- ✓ In applications where a level of chemical resistance is required
- ✓ In seals where acoustic properties are required
- ✓ As a waterproofing perimeter fillet beneath waterproofing membranes
- ✓ As a sealant in fibre cement facade systems (pre-testing recommended)

Specifications
<b>Cured State</b> Highly flexible
<b>Movement Capability (±)</b> 25%
<b>Skin Time</b> 30 - 40 mins (23°C, 50% RH)
<b>Cure Time</b> 2 - 3mm/day (23°C, 50% RH)
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Hybrid polymer
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaFlex™ 625 Hybrid Sealant 600ml Sausage</b> Resource Code: 7330554133	 Black	12
 <b>FulaFlex™ 625 Hybrid Sealant 600ml Sausage</b> Resource Code: 7329604133	 Grey	12
 <b>FulaFlex™ 625 Hybrid Sealant 440g Cartridge</b> Resource Code: 7043214250	 Black	12
 <b>FulaFlex™ 625 Hybrid Sealant 440g Cartridge</b> Resource Code: 7209534250	 Grey	12
 <b>FulaFlex™ 625 Hybrid Sealant 440g Cartridge</b> Resource Code: 7209544250	 White	12

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Concrete</li> <li>✓ Cement sheeting</li> <li>✓ Brick</li> <li>✓ Ceramic</li> <li>✓ Masonry</li> <li>✓ Plasterboard</li> <li>✓ Steel inc. stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Aluminium*</li> <li>✓ Timber</li> <li>✓ Particleboard</li> <li>✓ Glass**</li> <li>✓ Many plastics (pre-test)</li> </ul>
<p>* pre-test coated aluminium ** not suitable for external glazing</p>





## FulaFlex™ 650FC Fast Cure Hybrid Sealant

FulaFlex™ 650FC is a high performance, one-part hybrid moisture curing construction sealant and adhesive, which cures to form a seal that is tough, elastic and weatherproof. FulaFlex™ 650FC is a high modulus product, which can be used in areas of flooring where traffic may occur.

### Key Benefits

- ✓ Isocyanate and solvent free
- ✓ Flexible -  $\pm$  15% of original joint width.
- ✓ Excellent resistance to weathering and
- ✓ UV radiation, resists yellowing
- ✓ No bubble formation when curing
- ✓ Paintable with high build, flexible emulsion coatings
- ✓ Does not sag or slump in joints up to 30mm
- ✓ Strong adhesion

### Uses

- ✓ Sealing expansion and control joints in floors, pavement, roadways, walls, roofs, wall and floor penetrations, cladding and brickwork
- ✓ Elastic bonding of metals, engineered plastics, wood and ceramic surfaces
- ✓ In applications where a level of chemical resistance is required
- ✓ In seals where acoustic properties are required

Specifications
<b>Joint Width</b> 6-30mm
<b>Movement Capability (<math>\pm</math>)</b> 15%
<b>Service Temperature</b> -40°C to 100°C
<b>Skin Time</b> 15 - 25 mins (23°C, 50% RH)
<b>Cure Time</b> 2 - 3mm/day (23°C, 50% RH)
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Hybrid polymer
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaFlex™ 650FC PU Sealant 600ml Sausage</b> Resource Code: 7329594237	 grey	20
 <b>FulaFlex™ 650FC PU Sealant 600ml Sausage</b> Resource Code: 7331764237	 white	20
 <b>FulaFlex™ 650FC PU Sealant 420g Cartridge</b> Resource Code: 7329594410	 grey	12
 <b>FulaFlex™ 650FC PU Sealant 420g Cartridge</b> Resource Code: 7331764410	 white	12

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Concrete</li> <li>✓ Cement sheeting</li> <li>✓ Brick</li> <li>✓ Masonry</li> <li>✓ Plasterboard</li> <li>✓ Steel inc. stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Aluminium*</li> <li>✓ Timber</li> <li>✓ Particleboard</li> <li>✓ Glass**</li> <li>✓ Ceramic</li> <li>✓ Polystyrene</li> <li>✓ Many plastics (pre-test)</li> </ul>
* pre-test coated aluminium ** not suitable for external glazing

## FulaSeal™ Construction Joint Sealant

FulaSeal™ Construction Joint Sealant is a single component, water based, construction grade sealant for interior and exterior construction sealing applications. FulaSeal™ can be used in vertical and horizontal sealing applications where a flexible joint is required.







### Key Benefits

- ✓ Paintable
- ✓ Highly flexible: +/- 25% joint movement capability
- ✓ Water clean up
- ✓ Non toxic
- ✓ Excellent acoustic properties
- ✓ Non flammable
- ✓ Excellent stability to UV, ozone and airborne contaminants
- ✓ Acoustic rated to AS 1276.1
- ✓ Interior/exterior application

### Uses

- ✓ Joints in tilt-up and pre-cast concrete panels
- ✓ Sealant for joints in aluminium and steel frames
- ✓ Sealant for general gaps and cracks around construction sites
- ✓ Caulking hollow core ceiling and non-trafficable floor planks
- ✓ Sealing window and door frames
- ✓ Sealing vinyl, aluminium, steel and plywood sidings
- ✓ Sealing baseboards, bathroom and kitchen fixtures
- ✓ Repair mortar joints

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Joint Width</b> 30mm x 15mm Max	 <b>FulaSeal™ Construction Joint Sealant 10L Pail</b> Resource Code: 7013781513	 grey	1	<ul style="list-style-type: none"> <li>✓ Concrete</li> <li>✓ Cement sheeting</li> <li>✓ Masonry</li> <li>✓ Plasterboard</li> <li>✓ Mortar</li> <li>✓ Timber</li> <li>✓ Aluminium</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Glass</li> <li>✓ Fibreglass</li> <li>✓ Polystyrene</li> </ul>
<b>Movement Capability (+/-)</b> 25%	 <b>FulaSeal™ Construction Joint Sealant 600ml Sausage</b> Resource Code: 7013784237	 grey	15	
<b>Skin Time</b> 10 mins				
<b>Cure Time</b> Variable dependant on conditions, 7 - 10 days for thick skin formation				
<b>Mould &amp; Mildew Resistance</b> No				
<b>Paintable</b> Yes				
<b>Area</b> Interior only (do not expose to water until sufficiently cured)				
<b>Product Chemistry</b> Acrylic water based				
<b>Refer to TDS for additional technical information.</b>				



## FulaSeal PRO™ 840NS Cool Room Mastic



FulaSeal PRO™ 840NS is a non-skinning and non-corrosive polybutene based sealant, designed specifically for small joints in cool room installation. FulaSeal PRO™ 840NS is also suitable for concealed lap joints between plastics, metals and a wide range of common substrates.

### Key Benefits

- ✓ Non-Skinning Mastic
- ✓ Suitable for sealing small joints up to 3mm
- ✓ Permanently flexible – non hardening
- ✓ Excellent barrier to moisture vapour
- ✓ Mould & mildew resistant
- ✓ Strong adhesion to metals and many substrates
- ✓ Safe on polystyrene
- ✓ Excellent slump resistance

### Uses

- ✓ Sealing of small joints between insulated panels in cool / refrigerated rooms
- ✓ Sealing lap joints between plastics, metal, timber, glass, masonry and expanded foam panels

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Joint Width</b> up to 3mm	 <b>FulaSeal PRO™ 840NS Cool Room Mastic 460g Cartridge</b> Resource Code: 7186924010	 off white	20	<ul style="list-style-type: none"> <li>✓ Metal &amp; Coated Metals</li> <li>✓ Steel &amp; Stainless Steel</li> <li>✓ Galvanised steel</li> <li>✓ Aluminium</li> <li>✓ Sandwich Panels</li> <li>✓ Alucobond</li> <li>✓ Zincalume</li> <li>✓ Plastics (pre-test)</li> <li>✓ Polystyrene</li> <li>✓ Fibreglass</li> <li>✓ Timber</li> </ul>
<b>Movement Capability (+/-)</b> Designed to accommodate minimal movement i.e. differential movement between panels / substrates and is not elastomeric				
<b>Cure Time</b> Ready for service immediately after application, and is non-skinning and non-hardening, remaining permanently flexible				
<b>Temperature</b> -40°C to +50°C				
<b>Area</b> Interior				
<b>Product Chemistry</b> Polybutene Mastic				
<b>Refer to TDS for additional technical information.</b>				

# Silicones

H.B. Fuller offer a range of silicone sealant products suitable for heat resistant, roofing, glazing, bathrooms or drinking water storage system applications. Choosing the right silicone sealant will help you get the job done.





## FulaSeal PRO™ 300 Premium Grade Industrial Silicone

FulaSeal PRO™ 300 Premium Grade Industrial Silicone is a neutral cure, premium grade, silicone sealant specially formulated for use in glazing and industrial fabrication where a premium quality, non-corrosive sealant is required. It skins quickly and is easy to use. FulaSeal PRO™ 300 Premium Grade Industrial Silicone combines a high level of resistance to weathering with excellent adhesion, flexibility and durability. FulaSeal PRO™ 300 Premium Grade Industrial Silicone can also be used as an adhesive where a highly flexible, high temperature resistant bond is required.

### Key Benefits


- ✓ Fast Skinning
- ✓ Low Sag
- ✓ Low Shrinkage
- ✓ Neutral Cure
- ✓ UV & Weather Resistant
- ✓ Low VOC
- ✓ For use with potable (drinking) water (AS4020)

### Uses

- ✓ Sealing glass block structures, laminated glass, roof, gutters, tanks & silos
- ✓ Glass partitions
- ✓ Glazing & waterproofing of skylights
- ✓ Non structural weather sealing of curtain wall facades
- ✓ Sealing & insulating of electrical services
- ✓ Filling channels & sealing lap joints in metal fabrication
- ✓ Sealing sheet metal wall cladding
- ✓ Suitable for bonding standard silver-backed mirrors.

**Note:** Do not use in direct contact with silver coating of mirrors (e.g. on the edge of the mirror) or on vinyl and safety backed mirrors

Specifications
<b>Movement Capability (±)</b> 20%
<b>Skin Time</b> 10 - 15 mins
<b>Cure Time</b> 2mm per day (23°C, 50% RH)
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal PRO™ 300 Premium Grade Silicone Sealant 300g Cartridge</b> Resource Code: 7071884042	 black	20
 <b>FulaSeal PRO™ 300 Premium Grade Silicone Sealant 300g Cartridge</b> Resource Code: 7071864042	 grey	20
 <b>FulaSeal PRO™ 300 Premium Grade Silicone Sealant 300g Cartridge</b> Resource Code: 7359764286	 translucent	20
 <b>FulaSeal PRO™ 300 Premium Grade Silicone Sealant 300g Cartridge</b> Resource Code: 7071874042	 white	20

Compatible Substrates
✓ Ceramic
✓ Glass
✓ Concrete
✓ Plasterboard
✓ Timber
✓ Metal
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Aluminium
✓ Some plastics (pre-test)





## FulaSeal PRO™ 660 High Performance Silicone Sealant

FulaSeal PRO™ 660 is a high modulus, premium grade, neutral cure silicone sealant for a wide range of industrial, glazing, cladding, automotive and assembly applications. FulaSeal PRO™ 660 has extra high body reducing the risk of slumping when used on sloping surfaces, and exhibits superior adhesion on a wide range of surfaces.





### Key Benefits

- ✓ Quick skin time
- ✓ Excellent weathering and UV resistance
- ✓ For use with potable (drinking) water (AS4020)
- ✓ Neutral Cure

### Uses

- ✓ Glazing of butt joints and colonial bars, fin glazing
- ✓ Sealing laminated and reflective glass, water tank production
- ✓ Sealing of aluminium facades
- ✓ Bonding of solar pool heating collectors, fast moving industrial assembly
- ✓ Architectural facades and non-structural glazing

Specifications
<b>Movement Capability (±)</b> 25%
<b>Skin Time</b> 10 - 15 mins (23°C, 50% RH)
<b>Cure Time</b> 1 - 2mm per day
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water approved</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal PRO™ 660 High Performance Silicone Sealant 300g Cartridge</b> Resource Code: 7060914164	 translucent	12
 <b>FulaSeal PRO™ 660 High Performance Silicone Sealant 300g Cartridge</b> Resource Code: 7060924164	 black	12

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Timber</li> <li>✓ Ceramic</li> <li>✓ Metal</li> <li>✓ Steel inc. stainless</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Aluminium</li> <li>✓ Plasterboard</li> <li>✓ Glass</li> <li>✓ Concrete</li> <li>✓ Many plastics (pre-test)</li> </ul>

## FulaSeal PRO™ 260 Heat Resistant RTV Silicone

FulaSeal PRO™ 260 is a heat resistant RTV (Room Temperature Vulcanising) silicone specially formulated to be used in areas where heat resistant applications are required. FulaSeal PRO™ 260 may be used for a variety of industrial bonding and sealing applications. Can withstand intermittent temperatures of up to 312°C and continuous temperatures of 260°C.



### Key Benefits

- ✓ 100% industrial grade silicone for sealing and bonding
- ✓ Heat resistant up to 312°C
- ✓ Rapid curing - acetic cure
- ✓ Permanently flexible: +/- 25% joint movement
- ✓ Excellent resistance to weathering and UV radiation
- ✓ Resistant to vibration
- ✓ High tensile strength

### Uses

- ✓ General industrial bonding and sealing
- ✓ Sealing industrial ovens and oven belts
- ✓ Sealing gaskets in high temperature applications e.g. automotive engines
- ✓ Forming gaskets
- ✓ Repairing cracks requiring temperature resistance

### Specifications

**Movement Capability (±)** 25%

**Skin Time**  
15 - 20 mins (23°C, 50% RH)

**Cure Time**  
3mm/day (23°C, 50% RH)

**Mould & Mildew Resistance**  
No

**Paintable** No

**Potable Water approved** No

**Area** Interior/exterior

**Product Chemistry**  
Acetic cure silicone

### Compatible Substrates

- ✓ Ceramic
- ✓ Glass
- ✓ Steel inc. stainless
- ✓ Aluminium
- ✓ Fibreglass
- ✓ Timber

Not recommended for materials where the acetic acid by-product could cause corrosion,

**Refer to TDS for additional technical information.**

## FulaSeal PRO™ 730 RTV Adhesive & Sealant Silicone

FulaSeal PRO™ 730 industrial grade silicone is a multi purpose, acetic cure RTV silicone used for glazing, industrial sealing and bonding. FulaSeal PRO™ 730 is low modulus, forms a tough rubber like film which out-performs standard grade silicones and is UV, vibration and temperature resistant.



### Key Benefits

- ✓ 100% industrial grade silicone
- ✓ Industrial sealing and bonding
- ✓ Superior adhesion to glass
- ✓ Permanently flexible: +/- 25% joint movement capabilities
- ✓ Strong adhesion, sag resistant
- ✓ High tensile strength
- ✓ Suitable for indirect food contact use

### Uses

- ✓ General industrial bonding
- ✓ Thread sealing and emergency gaskets
- ✓ Glazing inc. toughened glass
- ✓ Bonding and sealing auto or appliance trim and parts
- ✓ Sealing flashing in vents, flues, marine cabins and aluminium windows
- ✓ Caulking joints in sheet metal stacks and ducting

### Specifications

**Movement Capability (±)** 25%

**Skin Time**  
15 - 20 mins (23°C, 50% RH)

**Cure Time**  
3mm/day (23°C, 50% RH)

**Mould & Mildew Resistance**  
No

**Paintable** No

**Potable Water Approved** No

**Area** Interior/exterior

**Product Chemistry**  
Acetic cure silicone

### Compatible Substrates





- ✓ Ceramic
- ✓ Glass
- ✓ Steel inc. stainless
- ✓ Aluminium
- ✓ Fibreglass
- ✓ Timber
- ✓ Plasterboard
- ✓ Many plastics (pre-test)

Not recommended for materials where the acetic acid by-product could cause corrosion,

**Refer to TDS for additional technical information.**

Replacement for: **FulaSeal PRO™ 620 High Performance Glazing Silicone**

Available Products	Colour	Ctn Qty
 <b>FulaSeal PRO™ 260 Heat Resistant RTV Silicone 300g Cartridge</b> Resource Code: 7057194189	 red	6

Available Products	Colour	Ctn Qty
 <b>FulaSeal PRO™ 730 RTV Adhesive &amp; Sealant Silicone 300g Cartridge</b> Resource Code: 7056094164	 translucent	12
 <b>FulaSeal PRO™ 730 RTV Adhesive &amp; Sealant Silicone 300g Cartridge</b> Resource Code: 7056104164	 black	12



## FulaSeal™ 700 Roof & Gutter Silicone Sealant

FulaSeal™ 700 Roof & Gutter Silicone Sealant is a neutral cure sealant that does not corrode materials commonly used in roofing and guttering. FulaSeal™ 700 Roof & Gutter is ideal for sealing and weatherproofing roof and rainwater systems.









### Key Benefits

- ✓ For use in contact with potable (drinking) water (AS4020)
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Neutral cure – will not corrode metal or concrete
- ✓ Water resistant
- ✓ UV and weather resistant

### Uses

- ✓ Sealing and weatherproofing roof and rainwater systems
- ✓ Sheet metal and aluminium roofing applications
- ✓ Sealing guttering, flashing and downpipes
- ✓ Sealing exterior cladding

Specifications
<b>Movement Capability (+/-)</b> 25%
<b>Skin Time</b> 10 - 15 mins (23°C, 50% RH)
<b>Cure Time</b> 2mm per day (23°C, 50% RH)
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 700 Roof &amp; Gutter Silicone 300g Cartridge</b> Resource Code: 6004524033	 translucent	20
 <b>FulaSeal™ 700 Roof &amp; Gutter Silicone 400g Cartridge</b> Resource Code: 6004504033	 grey	20
 <b>FulaSeal™ 700 Roof &amp; Gutter Silicone 300g Cartridge</b> Resource Code: 6004484033	 black	20
 <b>FulaSeal™ 700 Roof &amp; Gutter Silicone Value Pack 3x 300g Cartridges</b> Resource Code: 7354104430	 translucent	8

Compatible Substrates
✓ Timber
✓ Concrete
✓ Masonry
✓ Aluminium
✓ Lead
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Ceramic
✓ Glass
✓ Terracotta
✓ Many plastics (pre-test)

## FulaSeal™ 705 Brick & Concrete Silicone Sealant

FulaSeal™ 705 Brick & Concrete Silicone Sealant is a neutral cure sealant specially designed for use on surfaces where a weatherproof and flexible seal is required. FulaSeal™ 705 Brick & Concrete is ideal for sealing joints in brick walls and sealing expansion joints in concrete.



### Key Benefits

- ✓ Grey colour to match concrete structures
- ✓ Mineral filled to give increased film hardness
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Neutral cure – will not corrode metal or concrete

### Uses

- ✓ Sealing and weatherproofing
- ✓ Sealing and filling concrete gaps and cracks
- ✓ Filling expansion joints in concrete brickwork
- ✓ Repair cracks in walls, driveways and patios

## FulaSeal™ 710 Glazing Silicone Sealant

FulaSeal™ 710 Glazing Silicone Sealant is an acetic cure sealant specially formulated for use in general glazing and sealing applications. FulaSeal™ 710 combines resistance to weathering with excellent adhesion and flexibility.



### Key Benefits

- ✓ Seals water tight
- ✓ Permanently flexible: +/- 15% joint movement capability
- ✓ UV and weather resistant
- ✓ Acetic cure
- ✓ Interior/exterior applications

### Uses

- ✓ General glazing
- ✓ Bonding glass and plastics
- ✓ Sealing glass block structures
- ✓ Glazing and waterproofing skylights



Specifications
<b>Joint Width</b> Up to 25mm
<b>Movement Capability (±)</b> 25%
<b>Skin Time</b> 7 - 10 mins
<b>Cure Time</b> 2mm per day
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> No
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone

Compatible Substrates
✓ Brick
✓ Cement
✓ Concrete
✓ Ceramic
✓ Stone
✓ Cement sheeting
✓ Masonry
✓ Glass
✓ Plasterboard
<b>Refer to TDS for additional technical information.</b>

Specifications
<b>Movement Capability (±)</b> 15%
<b>Skin Time</b> 15 - 20 mins (23°C, 50% RH)
<b>Cure Time</b> 2mm per day
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> No
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Acetic cure silicone

Compatible Substrates
✓ Glass
✓ Fibreglass
✓ Timber
✓ Aluminium
✓ Zinc/galvanised steel
✓ Plasterboard
✓ Ceramic
✓ Many plastics (pre-test)
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 705 Brick &amp; Concrete Silicone Sealant 400g Cartridge</b> Resource Code: 6033084119	 grey	20

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 710 Glazing Silicone Sealant 300g Cartridge</b> Resource Code: 6004464033	 translucent	20

## FulaSeal™ 720 Paintable MS Silicone Sealant

FulaSeal™ 720 Paintable MS silicone sealant is a premium quality sealant specially designed to be permanently paintable. FulaSeal™ 720 Paintable has a +/- 25% joint movement capability, and can be used for interior/exterior applications.



### Key Benefits

- ✓ Paintable anytime with acrylic paint
- ✓ Bonds to most surfaces without priming
- ✓ Low VOC content
- ✓ Isocyanate and solvent free
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Interior/exterior applications
- ✓ Chemical and UV resistant

### Uses

- ✓ Sealing inside and outside the home
- ✓ Sealing and weatherproofing buildings
- ✓ Sealing window surrounds
- ✓ Sealing timber siding
- ✓ Sealing architraves and skirting boards

### Specifications

<b>Joint Width</b>	Up to 30mm
<b>Movement Capability (±)</b>	25%
<b>Skin Time</b>	100 - 200 mins
<b>Cure Time</b>	3mm/day
<b>Mould &amp; Mildew Resistance</b>	No
<b>Paintable</b>	Yes - acrylic (water based)
<b>Potable Water Approved</b>	No
<b>Area</b>	Interior/exterior
<b>Product Chemistry</b>	MS polymer

### Compatible Substrates

- ✓ Cement Sheetting
  - ✓ Concrete
  - ✓ Aluminium
  - ✓ Steel inc. stainless
  - ✓ Masonry
  - ✓ Ceramic
  - ✓ Timber
  - ✓ Plasterboard
  - ✓ Fibre cement sheet
  - ✓ Many plastics (pre-test)
- Refer to TDS for additional technical information.**

### Available Products

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 720 Paintable MS Silicone Sealant 400g Cartridge</b> Resource Code: 7330544245	 white	12

## FulaSeal™ 740 Bathroom & Kitchen Silicone Sealant

FulaSeal™ 740 Bathroom & Kitchen Silicone Sealant is specifically designed for use in sealing applications involving non-porous surfaces commonly found in bathrooms, kitchens and laundries.



### Key Benefits

- ✓ Contains fungicide that resists mould and mildew
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Acetic cure
- ✓ Seals water tight

### Uses

- ✓ Sealing and waterproofing around sinks and other plumbing fixtures
- ✓ Sealing around shower screen and bases
- ✓ Sealing around bath tubs and spas





### Specifications

<b>Movement Capability (±)</b>	25%
<b>Skin Time</b>	15 - 20 mins (23°C, 50% RH)
<b>Cure Time</b>	2mm per day (23°C, 50% RH)
<b>Mould &amp; Mildew Resistance</b>	Yes
<b>Paintable</b>	No
<b>Potable Water Approved</b>	No
<b>Area</b>	Interior/exterior
<b>Product Chemistry</b>	Acetic cure silicone

### Compatible Substrates

- ✓ Vitreous china
  - ✓ Glass
  - ✓ Timber
  - ✓ Ceramic tiles
  - ✓ Fibreglass
  - ✓ Baked enamel surfaces
  - ✓ Plasterboard
  - ✓ Zinc/galvanised steel
  - ✓ Steel inc. stainless
  - ✓ Many plastics (pre-test)
- Refer to TDS for additional technical information.**

### Available Products

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 740 Bathroom &amp; Kitchen Silicone Sealant 300g Cartridge</b> Resource Code: 6004444033	 translucent	20
 <b>FulaSeal™ 740 Bathroom &amp; Kitchen Silicone Sealant 300g Cartridge</b> Resource Code: 6004454033	 white	20



## FulaSeal™ 750 Multi Purpose Silicone Sealant

FulaSeal™ 750 Multi Purpose Silicone Sealant is suitable for a wide range of applications including those where galvanised metals and concrete are involved.



### Key Benefits



- ✓ Superior clarity
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Neutral cure – will not corrode metal or concrete
- ✓ Water resistant
- ✓ Suitable for potable (drinking) water (AS4020)

### Uses

- ✓ Sealing and weatherproofing buildings
- ✓ Non structural glazing
- ✓ Sealing leaking gutters and downpipes
- ✓ Sealing external cladding

Specifications
<b>Movement Capability</b> (±) 25%
<b>Skin Time</b> 7 - 10 mins
<b>Cure Time</b> 2mm per day
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone

Compatible Substrates
✓ Timber
✓ Glass
✓ Fibreglass
✓ Pre-cast panels
✓ Ceramic
✓ Stainless steel
✓ Concrete
✓ Laminated board
✓ Many plastics (pre-test)
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 750 Multi Purpose Silicone Sealant 300g Cartridge</b> Resource Code: 6004534033	 translucent	20

## FulaSeal™ 760 General Glazing Silicone Sealant

FulaSeal™ 760 General Glazing Silicone Sealant is a coal black, neutral cure sealant designed to complement commonly used window surrounds.



### Key Benefits



- ✓ Ideal for general glazing
- ✓ Permanently flexible: +/- 20% joint movement capability
- ✓ UV, weather and water resistant
- ✓ Neutral cure – will not corrode metal or concrete

### Uses

- ✓ Weather sealing and glazing
- ✓ Metal assembly
- ✓ Heating, air conditioning and ventilation

Specifications
<b>Joint Width</b> Up to 20mm
<b>Movement Capability</b> (±) 20%
<b>Skin Time</b> 10 - 20 mins
<b>Cure Time</b> 2mm per day
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> No
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone

Compatible Substrates
✓ Stainless steel
✓ Aluminium
✓ Glass
✓ Masonry
✓ Ceramic
✓ Zinalume
✓ Galvanised Iron
✓ Fibreglass
✓ Timber
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 760 General Glazing Silicone Sealant 400g Cartridge</b> Resource Code: 7318694220	 coal black	20



## FulaSeal™ 770 Sanitary Silicone Sealant











FulaSeal™ 770 Sanitary Silicone Sealant is specifically designed for use in wet areas and contains a mould and mildew inhibitor. FulaSeal™ 770 Sanitary Silicone is suitable for contact with aluminium shower screens.

### Key Benefits

- ✓ Primerless adhesion to the widest range of surfaces
- ✓ Contains fungicide that resists mould and mildew
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Neutral cure – will not corrode steel or galvanised iron
- ✓ Strong adhesion

### Uses

- ✓ Sealing around showers
- ✓ Sealing inside bath tubs
- ✓ Sealing around sinks
- ✓ Sealing in laundries
- ✓ Sealing and weather proofing sanitary ware and spas
- ✓ Suitable for wet areas

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Movement Capability (±)</b> 25%	 <b>FulaSeal™ 770 Sanitary Silicone 300g Cartridge</b> Resource Code: 6009094033	 translucent	20	<ul style="list-style-type: none"> <li>✓ Steel inc. stainless</li> <li>✓ Aluminium</li> <li>✓ Galvanised steel</li> <li>✓ Masonry</li> <li>✓ Ceramic</li> <li>✓ Zincalume</li> <li>✓ Laminated Plastic</li> <li>✓ Glass</li> <li>✓ Fibreglass</li> <li>✓ Many plastics (pre-test)</li> </ul>
<b>Skin Time</b> 5 - 10 mins (23°C, 50% RH)	 <b>FulaSeal™ 770 Sanitary Silicone 300g Cartridge</b> Resource Code: 6009104033	 white	20	
<b>Cure Time</b> 2mm/day (23°C, 50% RH)	 <b>FulaSeal™ 770 Sanitary Silicone 300g Cartridge</b> Resource Code: 7056084164	 almond ivory	12	
<b>Mould &amp; Mildew Resistance</b> Yes	 <b>FulaSeal™ 770 Sanitary Silicone 300g Cartridge</b> Resource Code: 7363134164	 mid grey	12	
<b>Paintable</b> No	 <b>FulaSeal™ 770 Sanitary Silicone 300g Cartridge</b> Resource Code: 7056074164	 tile grey	12	
<b>Potable Water Approved</b> No				
<b>Area</b> Interior/exterior				
<b>Product Chemistry</b> Neutral cure silicone				
<b>Refer to TDS for additional technical information.</b>				



## FulaSeal™ 780 Plumbers Silicone Sealant

FulaSeal™ 780 Plumbers Silicone Sealant is a non-corrosive neutral cure sealant that can be used on a wide range of substrates. It is ideal for roofing applications, exterior cladding, guttering, flashing, downpipes, general plumbing and is compatible with drinking water storage systems







### Key Benefits

- ✓ For use with potable (drinking) water (AS4020)
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Interior / Exterior
- ✓ Neutral cure – will not corrode steel or galvanised iron
- ✓ Water resistant

### Uses

- ✓ Used in sheet metal and aluminium roofing applications
- ✓ Exterior cladding
- ✓ Guttering
- ✓ Flashing
- ✓ Downpipes

Specifications
<b>Joint Width</b> Up to 25mm
<b>Movement Capability (±)</b> 25%
<b>Skin Time</b> 10 - 15 mins (23°C, 50% RH)
<b>Cure Time</b> 2mm/day (23°C, 50% RH)
<b>Mould &amp; Mildew Resistance</b> No
<b>Paintable</b> No
<b>Potable Water Approved</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Neutral cure silicone
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaSeal™ 780 Plumbers Silicone Sealant 300g Cartridge</b> Resource Code: 6009014033	 translucent	20
 <b>FulaSeal™ 780 Plumbers Silicone Sealant 300g Cartridge</b> Resource Code: 7024544033	 aluminium	20
 <b>FulaSeal™ 780 Plumbers Silicone Sealant 400g Cartridge</b> Resource Code: 6009024119	 grey	20

Compatible Substrates
✓ Steel
✓ Aluminium
✓ Zinc/galvanised steel
✓ Masonry
✓ Ceramic
✓ Lead
✓ Fibreglass
✓ Plasterboard
✓ Terracotta
✓ Many plastics (pre-test)
✓ Glass



## FulaSeal™ 790 Mirror & Metal Silicone Sealant

FulaSeal™ 790 Mirror & Metal Silicone Sealant is specially formulated for a wide range of sealing uses. FulaSeal™ 790 Mirror & Metal is ideal for bonding standard silvered mirrors to walls and for other general purpose metal bonding and sealing applications.



### Key Benefits

- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Interior/exterior applications
- ✓ UV and weather resistant
- ✓ Neutral cure – will not corrode metal or concrete

### Uses

- ✓ Sealing heating, ventilation and air-conditioning units
- ✓ Non structural glazing
- ✓ Metal assembly
- ✓ Bonding mirrors and metals
- ✓ Suitable for bonding standard silver-backed mirrors.

**Note:** Do not use in direct contact with silver coating of mirrors (e.g. on the edge of the mirror) or on vinyl and safety backed mirrors

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Movement Capability (±)</b> 25%	 <b>FulaSeal™ 790 Mirror &amp; Metal Silicone Sealant 300g Cartridge</b> Resource Code: 6009264033	 translucent	20	<ul style="list-style-type: none"> <li>✓ Glass</li> <li>✓ Mirror</li> <li>✓ Aluminium</li> <li>✓ Stainless steel</li> <li>✓ Zinc/galvanised steel</li> <li>✓ Brick</li> <li>✓ Ceramic</li> <li>✓ Concrete</li> <li>✓ Masonry</li> <li>✓ Many plastics (pre-test)</li> </ul>
<b>Skin Time</b> 7 - 15 mins (23°C, 50% RH)				
<b>Cure Time</b> 2mm/day (23°C, 50% RH)				
<b>Mould &amp; Mildew Resistance</b> No				
<b>Paintable</b> No				
<b>Potable Water Approved</b> No				
<b>Area</b> Interior/exterior				
<b>Product Chemistry</b> Neutral cure silicone				
<b>Refer to TDS for additional technical information.</b>				




## Silicone





# Flooring

H.B. Fuller's flooring adhesive and moisture control products are formulated for easy, smooth application on most common substrates to provide a permanent covering and ongoing structural integrity.

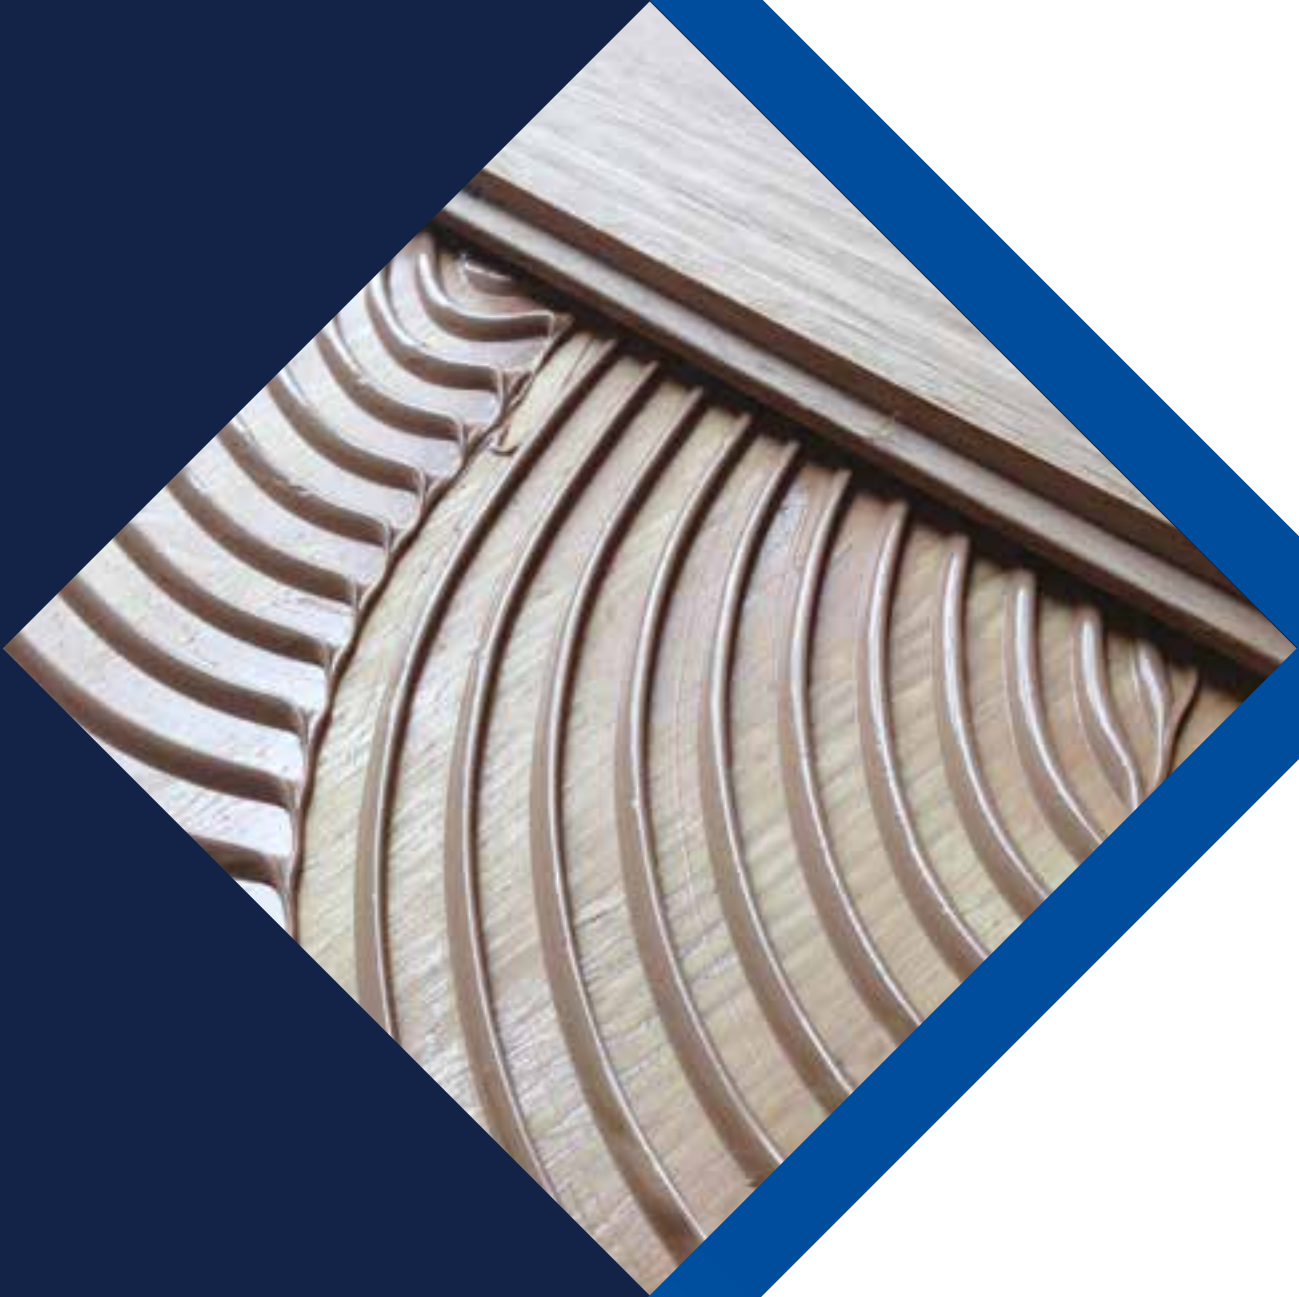





## Floor Bond™ XMS Sub-Floor Flexible Adhesive

Floor Bond™ XMS Sub-Floor is a high strength, high performance, hybrid polymer flexible adhesive designed for adhering flooring components to sub-frames. Suitable for timber or steel frames and compatible with a variety of construction substrates, Floor Bond™ XMS Sub-Floor is the ideal adhesive where some flexibility is required.



### Key Benefits

- ✓ Non toxic - contains no water, solvents or isocyanates
- ✓ Permanently flexible
- ✓ Easy to apply
- ✓ No black hands/skin after use, unlike with polyurethanes

### Uses

- ✓ Perfect for timber and metal joist applications
- ✓ Ideal for sub-floor bead application 3 - 15mm
- ✓ Bonding many types of timber flooring
- ✓ Areas where movement and noise need to be absorbed
- ✓ Full contact bonding where a water and solvent free adhesive is required

Specifications
<b>Cured State</b> Slightly flexible
<b>Skin Time</b> 60 - 100 mins (23°C, 50% RH)
<b>Cure Time</b> 2mm/day 23°C, 50% RH)
<b>Paintable</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Hybrid polymer
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Floor Bond™ Sub-Floor Timber Flooring Adhesive 470g Cartridge</b> Resource Code: 7026904202	 brown	12

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Steel inc. stainless</li> <li>✓ Aluminium</li> <li>✓ Metal</li> <li>✓ Concrete</li> <li>✓ Cement Sheeting</li> <li>✓ Brick</li> <li>✓ Plywood</li> <li>✓ Particleboard</li> <li>✓ MDF</li> <li>✓ Timber</li> <li>✓ Ceramic tiles</li> <li>✓ Plasterboard</li> </ul>

## Floor Bond™ MC1 Moisture Control Barrier

Floor Bond™ MC1 is a single-coat, water based moisture vapour controller with fast drying and over-coating properties. It can be applied to damp and new concrete. Floor Bond™ MC1 has been formulated to be used with XMS adhesive to provide a complete timber flooring solution.





### Key Benefits

- ✓ One-part – no mixing required
- ✓ One-coat – easy to apply
- ✓ Can be over-coated with Floor Bond XMS after 3 hours
- ✓ Water-based, easy clean up
- ✓ No priming required
- ✓ Can be applied at up to 100% relative humidity
- ✓ Zero VOC – 0g/L (Green Star compliant)

### Uses

- ✓ Moisture controller under hybrid timber flooring adhesive to control the rate of moisture transmission and reduce the risk of timber failure/cupping
- ✓ Improves adhesion of hybrid timber flooring adhesive to concrete

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<p><b>Application Temperature</b> 10°C to 35°C</p> <p><b>Working Time</b> 10 - 20 mins</p> <p><b>Skin Time</b> 20 mins</p> <p><b>Over-Coat Time</b> 3 Hours @ 23°C, 4 - 5 Hours @ 10°C</p> <p><b>Area</b> Interior only</p> <p><b>Product Chemistry</b> Water based</p> <p><b>Refer to TDS for additional technical information.</b></p>	<p> <b>Floor Bond™ MC1 Moisture Control Barrier 12kg Pail</b> Resource Code: 7200741500</p>	<p> blue/ green</p>	<p>1</p>	<ul style="list-style-type: none"> <li>✓ Concrete</li> <li>✓ Cement Sheeting</li> <li>✓ Plasterboard</li> </ul>

## Floor Bond™ XMS Timber Flooring Adhesive

Floor Bond™ XMS is a high strength, high performance, hybrid polymer flooring adhesive. Ready to use with no mixing required, extremely smooth and easy to trowel. As Floor Bond™ XMS contains no water or solvents, the risk of deforming timber flooring is eliminated.







### Key Benefits

- ✓ Non toxic - contains no water, solvents or isocyanates
- ✓ Forms stable peaks once applied with a notched trowel
- ✓ Acoustic rated in conjunction with matting; CSIRO Report No. INR 157
- ✓ Floor Bond XMS™ 16kg is reusable for up to 6 weeks if lid has been correctly fitted
- ✓ Permanently flexible
- ✓ No black hands/skin after use, unlike with polyurethanes
- ✓ ATFA approved product

### Uses

- ✓ Bonding many types of timber flooring
- ✓ Suitable for floors with under floor heating
- ✓ Areas where movement and noise need to be absorbed
- ✓ Suitable for over joist applications
- ✓ Full contact bonding where a water and solvent free adhesive is required

Specifications
<b>Cured State</b> Slightly flexible
<b>Typical Film Thickness</b> Up to 10mm trowel
<b>Skin Time</b> 60 - 100 mins (23°C, 50% RH)
<b>Cure Time</b> 2mm/day 23°C, 50% RH)
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Hybrid polymer
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Floor Bond™ XMS Timber Flooring Adhesive 960g Sausage</b> Resource Code: 7026904251	 brown	15
 <b>Floor Bond™ XMS Timber Flooring Adhesive 16kg Pail</b> Resource Code: 7026901513	 brown	1

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Steel inc. stainless</li> <li>✓ Aluminium</li> <li>✓ Metal</li> <li>✓ Concrete</li> <li>✓ Cement Sheeting</li> <li>✓ Brick</li> <li>✓ Plywood</li> <li>✓ Particleboard</li> <li>✓ MDF</li> <li>✓ Timber</li> <li>✓ Ceramic</li> <li>✓ Plasterboard</li> </ul>

# Fire Rated

H.B. Fuller invests heavily into formulating and performance testing advanced fire rated sealants and fillers to ensure peace of mind. Engineered with superior strength and durability, H.B. Fuller fire rated sealants and fillers are designed to work when it counts.





## FulaFoam™ Fire Resistant Expanding Foam

FulaFoam™ Fire Resistant Expanding Foam will fill cavities, is fire resistant for up to 3 hours and provides high acoustic insulation. FulaFoam™ Fire Resistant will not shrink when cured and will provide an airtight seal, and can be cut, sanded, plastered or painted.

### Key Benefits





- ✓ Fire resistant polyurethane expanding foam (Tested to AS1530.4)
- ✓ Efficient seal against smoke
- ✓ High bond strength
- ✓ High thermal and acoustic insulation
- ✓ Does not contain CFC's or H-CFC's

### Uses

- ✓ Fire resistant installation of window and door frames
- ✓ Fire and smoke resistant sealing of connections between partition walls, ceilings and floors
- ✓ Filling of cavities
- ✓ Applications where fire resistant characteristics are required such as:
  - Sealing of all openings in roof constructions
  - Sealing of cable and pipe penetrations
  - Creation of a sound-proof screen
  - Bonding of insulation materials
  - Application of sound-deadening layers
  - Improving thermal insulation in cold store areas

**CONSULT A FIRE ENGINEER BEFORE  
USE IN A FIRE RATED APPLICATION**

Specifications
<b>Joint Width</b> N/A
<b>Movement Capability (+/-)</b> N/A
<b>Skin Time</b> 12 - 16 mins (23°C, 50% RH)
<b>Cure Time</b> 18 hours (23°C) 24 Hours (-5°C)
<b>Paintable</b> Yes
<b>Area</b> Interior/exterior (if painted)
<b>Fire Rated</b> Yes
<b>Product Chemistry</b> Polyurethane
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaFoam™ Fire Resistant Expanding Foam 500ml Can</b> Resource Code: 7011954084	 pink	12
 <b>FulaFoam™ Fire Resistant Expanding Foam 750ml Can</b> Resource Code: 7011954007 Note: Available 2019	 pink	12

Compatible Substrates
✓ Concrete
✓ Mortar
✓ Cement sheeting
✓ Timber
✓ MDF
✓ Particleboard
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Aluminium
✓ Plasterboard
✓ Fibreglass
✓ Ceramics



## Firesound™ Fire Rated Acoustic Sealant

Firesound™ is formulated primarily to perform as a barrier to the incursion of fire through expansion joints and wall penetrations such as pipes or cables. Firesound™ is also an effective acoustic sealant.

### Key Benefits









- ✓ Fire rating for gaps up to 50mm
- ✓ Up to 4 hour fire rating (AS1530.4)
- ✓ Excellent acoustic properties (STC 65)
- ✓ Good flexibility; +/- 20% joint movement capability
- ✓ Paintable
- ✓ Intumescent; expands when exposed to fire or extreme heat.

### Uses

- ✓ Sealing exterior and interior construction joints that are subject to movement (up to +/- 20%) in pre-cast concrete panels, block work, brickwork and fire-rated plasterboard
- ✓ Gaps around cables, metal pipes, conduits, busways and ducts that penetrate walls, floors and ceilings
- ✓ If joint movement is not required, Firesound can be used as a putty for filling holes in fire rated substrates
- ✓ Refer to page 58 for Recommended Joint Configurations

**CONSULT A FIRE ENGINEER BEFORE  
USE IN A FIRE RATED APPLICATION**

Specifications
<b>Joint Width</b> 10mm x 10mm to 50mm x 25mm max
<b>Movement Capability (±)</b> 20%
<b>Skin Time</b> 15 mins (23°C, 50% RH)
<b>Cure Time</b> Variable dependant on condition
<b>Paintable</b> Yes
<b>Area</b> Interior/exterior (protect from water until sufficiently cured)
<b>Fire Rated</b> Yes
<b>Product Chemistry</b> Acrylic
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Firesound™ Fire Rated Acoustic Sealant 450g Cartridge</b> Resource Code: 6025914042	 grey	20
 <b>Firesound™ Fire Rated Acoustic Sealant 600ml Sausage</b> Resource Code: 6026194133	 grey	15
 <b>Firesound™ Fire Rated Acoustic Sealant 600ml Sausage</b> Resource Code: 6011944132 Note: Made to order	 white	15
 <b>Firesound™ Fire Rated Acoustic Sealant 10L Pail</b> Resource Code: 6011741513	 grey	1

Compatible Substrates
✓ Concrete
✓ Mortar
✓ Brick
✓ Masonry
✓ Fire rated plasterboard
✓ Aluminium
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Cable coverings (PVC)



# **Firesound™ Fire Test & Appraisal Summary**

FIRE TEST ASSEMBLY	TEST REPORT OR APPRAISAL	Seal Configuration			Report Type		Conformance		Fire Rating
		Both Fire & Non-Fire Side	Fire Side Only	Non-Fire Side Only	Fire Test	Appraisal	AS 1530.4 & AS 4072.1	BS 476: Part 20: 1987	
Joints									
1 x 13mm Fire Rated Plasterboard Wall Joint	EWFA 44715000.1	Yes			Yes		Yes (2014)		Up to 90 mins
2 x 16mm Fire Rated Plasterboard Wall Joints¹	WFRA 40922	Yes			Yes		Yes (1997)		Up to 180 mins
Aerated Concrete Wall Joints¹	WFRA 41257 & 41257_BS	Yes			Yes		Yes (2005)	Yes	Up to 180 mins
Concrete Walls & Floor Joints¹	WFRA 40869, 45628, 45628b (BS) 21503-03 & 27851.1 (BS)	Yes	Yes		Yes	Yes x2	Yes (1997 & 2014)	Yes	Up to 240 mins
Masonry Wall Joint¹	WFRA 41003.1 EWFA 28122.03	Yes		Yes	Yes	Yes	Yes (1997 & 2014)		Up to 180 mins
Penetrations									
1 x 13mm Fire Rated Plasterboard Pipe & Cable Penetration²	EWFA 44715000.1	Yes			Yes		Yes (2014)		Up to 90 mins
2 x 13mm Fire Rated Plasterboard Pipe & Cable Penetrations²	EWFA 48763900.1	Yes			Yes		Yes (2014)		Up to 180 mins
2 x 13mm Fire Rated Plasterboard Pipe & Cable Penetrations²	WFRA 41118.1	Yes			Yes		Yes (1997)		Up to 90 mins
Concrete & Masonry Pipe & Cable Penetrations²	WFRA 41003.1 EWFA 27001.03	Yes			Yes	Yes	Yes (1997 & 2014)		Up to 240 mins
1 x 78mm Speedpanel Pipe & Cable Penetrations	FSV 1731	Yes			Yes		Yes (2014)		Up to 120 mins
Aerated Concrete Pipe & Cable Penetrations²	WFRA 41257 & 41257_BS	Yes			Yes		Yes (2005)	Yes	Up to 180 mins
Concrete & Masonry Pipe & Cable Penetrations²	WFRA 41003.1 EWFA 27001.03	Yes			Yes	Yes	Yes (1997 & 2014)		Up to 240 mins

## **Notes:**

1 - Refer to individual test or appraisal data for information relating to joint configurations and wall/floor thickness.

2 - Refer to individual test or appraisal data for information relating to cable and pipe penetrations and wall/floor thickness.

Correct at November 2017. For the latest reports visit: [www.hbfuller.com.au](http://www.hbfuller.com.au)

# Multi Use

Having the right tool for the job is important, but having a tool that can perform multiple tasks can be a very handy time saver. Our range of multi use products can help with filling gaps, fixing tiles, adhering timber trims and adding the finishing touch to an installation.





## Tool Box™ Original MS Adhesive & Sealant

Tool Box™ is an MS polymer, moisture curing adhesive and sealant in one that cures to form a tough, water resistant seal. Tool Box™ adheres to a wide variety of materials and is a true 'tool box' in a cartridge.









### Key Benefits

- ✓ Sticks and seals just about anything
- ✓ Interior/exterior
- ✓ Paintable with most water-based paints
- ✓ Rapid skinning and curing
- ✓ Non toxic; isocyanate and solvent free
- ✓ Resistant to salt and chlorinated water
- ✓ Mould resistant
- ✓ Anti-pick - suitable for use in correctional facilities

### Uses

- ✓ Sealing lap joints in box guttering
- ✓ Sealing air conditioning ducts
- ✓ Adhesive for fixing wall panels to studs, floor boards to joists
- ✓ Re-fixing loose ceramic tile
- ✓ Adhering and sealing acrylic/ABS shower units
- ✓ Adhering end-caps to retaining walls
- ✓ Sealing gaps and expansion joints in concrete, brick, mortar, metal and stonework
- ✓ Suitable for Green Building applications max. VOC: 30g/L

Specifications
<b>Joint Width</b> 10mm to 30mm max
<b>Movement Capability (±)</b> 20%
<b>Skin Time</b> 10 - 15 mins (23°C, 50% RH)
<b>Cure Time</b> 2mm/day (23°C, 50% RH)
<b>Mould &amp; Mildew Resistance</b> Yes
<b>Paintable</b> Yes - acrylic (water based)
<b>Trafficable</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> MS polymer <b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>Tool Box™ Original MS Adhesive &amp; Sealant 400g Cartridge</b> Resource Code: 7029764250	 white	12
 <b>Tool Box™ Original MS Adhesive &amp; Sealant 400g Cartridge</b> Resource Code: 7029774250	 grey	12
 <b>Tool Box™ Original MS Adhesive &amp; Sealant 400g Cartridge</b> Resource Code: 7063564250	 black	12
 <b>Tool Box™ Original MS Adhesive &amp; Sealant 500ml Sausage</b> Resource Code: 7052624237	 white	20

Compatible Substrates
✓ Concrete
✓ Cement Sheeting
✓ Cement render
✓ Ceramic
✓ Glass
✓ Steel inc. stainless
✓ Zinc/galvanised steel
✓ Aluminium
✓ Polystyrene
✓ Plasterboard
✓ Timber
✓ Many plastics (pre-test)
✓ Fibreglass

## Tool Box™ High Tack Adhesive & Sealant

Tool Box™ High Tack is a one-part, high modulus, permanently flexible hybrid adhesive with superior wet-grab strength. It is ideal for bonding heavy objects such as metal signs to vertical surfaces. Tool Box™ High Tack's superior grab strength makes it especially suitable for bonding various ceiling components.



### Key Benefits

- ✓ Isocyanate and solvent free
- ✓ Fast grab
- ✓ Rapid skinning and curing
- ✓ High viscosity, powerful adhesion
- ✓ Permanently flexible - suitable for surfaces prone to vibration
- ✓ Shock and impact resistant

### Uses

- ✓ Ideal for installing ceiling components
- ✓ Suitable for metals, timber and most construction substrates
- ✓ Suitable for vehicle assembly including caravan construction
- ✓ Ideal for signage installation
- ✓ Suitable for Green Building applications max. VOC: 30g/L

### Specifications

<b>Skin Time</b>
20 mins (23°C, 50% RH)
<b>Cure Time</b>
3mm/day (23°C, 50% RH)
<b>Service Temperature</b>
-40°C - 100°C
<b>Paintable</b>
Yes - acrylic (water based)
<b>Hardness</b> Shore A: ca. 60
<b>Area</b> Interior/exterior
<b>Product Chemistry</b>
Hybrid polymer

### Compatible Substrates


- ✓ Concrete
- ✓ Cement sheeting
- ✓ Masonry inc. brick
- ✓ Steel inc. galvanised
- ✓ Aluminium inc. anodised
- ✓ Glass
- ✓ Timber
- ✓ Plasterboard
- ✓ Most plastics and rubbers (pre-test)

**Refer to TDS for additional technical information.**

### Available Products

### Colour

### Ctn Qty



white

12

## Tool Box™ Invisible Adhesive & Sealant

Tool Box™ Invisible is a clear hybrid moisture curing adhesive and sealant for use in a wide variety of applications. Tool Box™ Invisible is ideal for invisible, transparent joints and bonding and cures to form a tough, waterproof seal.



### Key Benefits

- ✓ Solvent and isocyanate free
- ✓ Free of phthalate plasticisers
- ✓ Cures to form a permanently flexible and elastic bond
- ✓ Rapid skinning and curing.
- ✓ Invisible after curing
- ✓ Interior/exterior – High UV resistance
- ✓ Mould, chemical and heat resistant (to 80°C)

### Uses

- ✓ External and internal construction
- ✓ Sealing and bonding a wide variety of substrates
- ✓ For transparent, colourless results
- ✓ Sealing gaps in concrete, brick, mortar, metal and stonework.
- ✓ Suitable for Green Building applications max. VOC: 30g/L

### Specifications

<b>Joint Width</b> Up to 30mm max
<b>Movement Capability (±)</b> 20%
<b>Skin Time</b> 10 - 15 mins
<b>Cure Time</b>
2mm/day (23°C, 50% RH)
<b>Mould &amp; Mildew Resistance</b>
Yes
<b>Paintable</b> Yes (pre-test)
<b>Trafficable</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b>
Hybrid polymer

### Compatible Substrates


- ✓ Concrete
- ✓ Cement sheeting
- ✓ Steel inc. galvanised
- ✓ Metal inc. aluminium
- ✓ Glass
- ✓ Particleboard
- ✓ Timber
- ✓ Plasterboard
- ✓ Most plastics and rubbers (pre-test)

**Refer to TDS for additional technical information.**

### Available Products

### Colour

### Ctn Qty



clear

6



clear

12

## FulaSeal™ 701 Flexible Ultra Clear Sealant

FulaSeal™ 701 Flexible Ultra Clear Sealant is an easy to use, flexible, water clean up sealant, which dries clear and will not attack plastics or metals. FulaSeal™ 701 Flexible Ultra Clear Sealant is suitable for many interior and exterior household applications.



### Key Benefits

- ✓ Dries clear
- ✓ Water clean up
- ✓ Interior/exterior use
- ✓ Permanently flexible,  $\pm 25\%$  joint movement
- ✓ Strong adhesion
- ✓ Mould resistant
- ✓ Paintable
- ✓ Low odour

### Uses

- ✓ Roofing - especially polycarbonate
- ✓ Sealing around windows and doors
- ✓ Sealing weatherboard panels
- ✓ Sealing gaps and cracks
- ✓ Alternative to silicone or solvent based sealants

**Note:** Protect from water until sufficiently cured

### Specifications

**Movement Capability ( $\pm$ )** 25%

**Skin Time** 10 - 20mins

**Cure Time**  
Variable dependant on conditions

**Mould & Mildew Resistance**  
Yes

**Paintable** Yes

**Area** Interior/exterior

**Product Chemistry**  
Acrylic

### Compatible Substrates

- ✓ Roofing inc Polycarbonate
- ✓ Glass
- ✓ Cement sheeting
- ✓ Masonry inc mortar
- ✓ Gypsum
- ✓ Metal
- ✓ Fibreglass
- ✓ Timber inc weatherboards
- ✓ Many plastics (pre-test)

**Refer to TDS for additional technical information.**

### Available Products

### Colour

### Ctn Qty



**FulaSeal™ 701 Flexible Ultra Clear Sealant 300g Cartridge**  
Resource Code: 6012974042



Clear

20

## FulaSeal™ 711 Clear Sealant

FulaSeal™ 711 Clear Sealant is a premium copolymer sealant that combines flexibility with strong adhesion. It can be used on most building materials, inside and outside the home. FulaSeal™ 711 Clear Sealant is mould resistant, can be painted, has excellent weather resistance and is easy to apply.



### Key Benefits

- ✓ Suitable for wet surfaces
- ✓ Interior/exterior use
- ✓ Forms a touch dry skin within 5 minutes
- ✓ Resists mould and mildew
- ✓ Drip resistant
- ✓ Flexible
- ✓ Paintable
- ✓ Resists shrinking. Will not split or crack

### Uses

- ✓ Sealant in wet areas (not for immersion)
- ✓ Roofing and guttering
- ✓ Skylights
- ✓ Shower screens
- ✓ Sinks and basins
- ✓ Window frames

### Specifications

**Joint Width** N/A

**Movement Capability ( $\pm$ )** 25%

**Skin Time** 5 mins

**Cure Time** 7 days

**Mould & Mildew Resistance**  
Yes

**Paintable** Yes

**Area** Interior/exterior

**Product Chemistry**  
Solvent based copolymer

### Compatible Substrates

- ✓ Concrete
- ✓ Cement render
- ✓ Cement sheeting
- ✓ Metal
- ✓ Plasterboard
- ✓ Timber
- ✓ Plywood
- ✓ Particleboard
- ✓ Polyurethane foam

**Refer to TDS for additional technical information.**

### Available Products

### Colour

### Ctn Qty



**FulaSeal™ 711 Clear Sealant 270g Cartridge**  
Resource Code: 6034554048



Clear

6



## Caulk in Colours™ Acrylic Sealant

Caulk in Colours™ acrylic sealant is a flexible, water based joint sealant for use in sealing expansion and other joints in residential construction work and tiling. It can be used for interior and exterior jobs and dries “true” to its wet colour. It won’t crack, peel or split over time.

### Key Benefits

- ✓ The premium, market leading caulk sealant
- ✓ Dries ‘true’ to wet colour
- ✓ Won’t crack, peel or split over time
- ✓ Good for horizontal and vertical applications
- ✓ Flexible: +/- 20% joint movement capability
- ✓ Interior/exterior use

### Uses

- ✓ Sealant in wet areas where immersion does not occur
- ✓ Filling gaps between baths, basins, shower recesses and tiles
- ✓ Expansion joints in brickwork, walls and tiles
- ✓ Sealing around architraves, window and door frames
- ✓ Expansion joints around the perimeter of timber floors

**Note:** Protect from water until sufficiently cured

### Specifications

**Movement Capability (±)**  
20%

**Skin Time**  
10 mins (23°C, 50% RH)

**Cure Time**  
Variable dependant on conditions

**Mould & Mildew Resistance**  
Yes

**Paintable**  
Yes

**Potable Water approved**  
No

**Area**  
Interior/exterior

**Product Chemistry**  
Acrylic

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Concrete
- ✓ Cement sheeting
- ✓ Brick
- ✓ Steel inc. stainless
- ✓ Zinc/galvanised steel
- ✓ Aluminium
- ✓ Plasterboard
- ✓ Timber
- ✓ Particleboard
- ✓ Plywood
- ✓ Ceramic
- ✓ Polystyrene
- ✓ Polyurethane Foam





















## Multi Use

Caulk in Colours™ has been providing the trade preferred finish to projects for decades. Matched with the changing trends in tile and paint colours, Caulk in Colours™ is the perfect match of strength and flexibility that stands up to the test of time.

Available Products	Colour	Ctn Qty
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 7001734112	 brilliant white	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6003484112	 white	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6008324112	 light ivory	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6003474112	 vanilla	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030994112	 fawn	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030954112	 mocca	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6031104112	 cream	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030964112	 terracotta	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030934112	 earth	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6003384112	 cedar	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030944112	 warm brown	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030924112	 light grey	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6030974112	 charcoal	6
<b>Caulk in Colours™ 450g Cartridge</b> Resource Code: 6003354112	 black	6

Brilliant White

White

Light Ivory

Vanilla

Fawn

Mocca

Cream

Terracotta

Earth

Cedar

Warm Brown

Light Grey


Charcoal

Black

# Fillers

Gaps, cracks and holes found when building, need a fast professional result the first time. Use our range of fillers to give your project a high quality finish.



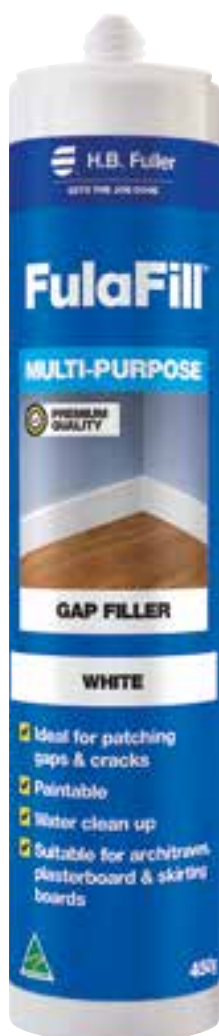

## FulaFill™ Multi-Purpose Gap Filler

FulaFill™ Multi-Purpose Gap Filler is a premium quality, acrylic gap filler designed for general purpose gap filling around the home. Its no-slump formula makes it easy to apply and clean up is just as simple.

### Key Benefits





- ✓ Remains flexible - years after use
- ✓ Tools and finishes perfectly
- ✓ Paintable
- ✓ Interior/exterior
- ✓ Water clean up
- ✓ Does not slump or sag

### Uses

- ✓ Patching gaps around skirting boards and architraves
- ✓ Filling gaps around window frames
- ✓ Patching gaps around cornices

**Note:** Protect from water until sufficiently cured

Specifications
<b>Finish</b> Fine
<b>Maximum Crack/Hole Size</b> 25mm
<b>Skin Time</b> 15 mins
<b>Cure Time</b> Variable dependant on conditions
<b>Sandable</b> Yes
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Acrylic
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaFill™ Gap Filler 450g Cartridge</b> Resource Code: 6003954042	 white	20
 <b>FulaFill™ Gap Filler Value Pack 3x 450g Cartridges</b> Resource Code: 6003954428	 white	8

Compatible Substrates
<ul style="list-style-type: none"> <li>✓ Plasterboard</li> <li>✓ Brick</li> <li>✓ Cement sheet</li> <li>✓ Aluminium</li> <li>✓ Cement render</li> <li>✓ Timber**</li> <li>✓ Concrete</li> <li>✓ Ceramics</li> </ul>
** not suitable for weatherboard

## FulaFoam™ Expanding Foam

FulaFoam™ Expanding Foam is a triple expanding, general purpose, polyurethane foam that will fill cavities ranging in size from small gaps to larger spaces. FulaFoam™ Expanding Foam can be used inside or outside, will adhere to a wide range of substances and will provide an airtight, moisture resistant seal when cured.



### Key Benefits

- ✓ Triple expanding
- ✓ Fills cavities without shrinking
- ✓ Can be cut and sanded to produce a neat and tidy finish
- ✓ When cut can be filled to produce a smooth finish
- ✓ Paintable
- ✓ Ozone friendly

### Uses

- ✓ Sealing around penetrations through walls and floors
- ✓ Filling holes in walls
- ✓ Filling wide gaps and cracks around window frames
- ✓ Sealing against draughts, moisture and noise
- ✓ Insulating

## FulaFoam™ Pro Gun Applied Foam

FulaFoam™ Pro Gun Applied foam is a triple expanding, general purpose, polyurethane foam that will seal against noise and moisture, as well as fill holes and penetrations. Suitable for use with many commonly used building materials, including polystyrene.



### Key Benefits

- ✓ Triple expanding
- ✓ Includes single use straw applicator
- ✓ Fills cavities without shrinking
- ✓ Polystyrene safe
- ✓ When cut can be filled to produce a smooth finish
- ✓ Paintable
- ✓ Ozone friendly

### Uses







- ✓ Sealing around penetrations through walls and floors
- ✓ Filling holes in walls
- ✓ Filling wide gaps and cracks around window frames
- ✓ Sealing against draughts, moisture and noise
- ✓ Noise and thermal insulator
- ✓ Concrete form sealant



Specifications
<b>Finish</b> Smooth uncut, aerated cut
<b>Maximum Crack/Hole Size</b> Fill big cavities in stages
<b>Skin Time</b> 10 - 15 mins
<b>Cure Time</b> 30mm bead 80% in 2 hrs, full cure in 24 hrs
<b>Sandable</b> No
<b>Area</b> Interior/exterior (if painted)
<b>Product Chemistry</b> Polyurethane
<b>Refer to TDS for additional technical information.</b>

Compatible Substrates
✓ Concrete
✓ Brick
✓ Cement sheeting
✓ Timber & plywood
✓ Particleboard
✓ Plasterboard
✓ Fibreglass
✓ Zinc/galvanised steel
✓ Steel inc. stainless
✓ Aluminium

Specifications
<b>Finish</b> Smooth uncut, aerated cut
<b>Maximum crack/hole size</b> Fill big cavities in stages
<b>Skin time</b> 10 - 15 mins
<b>Cure time</b> 30mm bead 80% in 2 hrs, full cure in 24 hrs
<b>Sandable</b> No
<b>Area</b> Interior / Exterior (if painted)
<b>Product Chemistry</b> Polyurethane
<b>Refer to TDS for additional technical information.</b>

Compatible Substrates
✓ Concrete
✓ Brick
✓ Cement sheeting
✓ Timber
✓ Particleboard
✓ Plasterboard
✓ Fibreglass
✓ Metal
✓ Steel inc. stainless
✓ Aluminium
✓ Polystyrene

Available Products	Colour	Ctn Qty
 <b>FulaFoam™ Foam 300ml Can</b> Resource Code: 7031334161	 yellow	12
 <b>FulaFoam™ Foam 500ml Can</b> Resource Code: 7031334084	 yellow	12
 <b>FulaFoam™ Foam 750ml Can</b> Resource Code: 7031334007	 yellow	12

Available Products	Colour	Ctn Qty
 <b>FulaFoam™ Pro Gun Triple Expanding Foam 750ml Can</b> Resource Code: 7068444161	 yellow	12

## FulaFoam™ Low Expansion Foam

FulaFoam™ PRO Flexible Low Expansion Foam is a specially formulated PU gun-applied foam that has highly efficient thermal and acoustic properties – up to 50% better than standard PU foams.



### Key Benefits

- ✓ Fills cavities without shrinking or warping
- ✓ Low expansion – Easy to control application
- ✓ Ready to cut in 30 minutes
- ✓ Unique micro-cell structure provides improved thermal and acoustic insulation
- ✓ Can be applied at air temperatures 0°C –30°C

### Uses

- ✓ Sealing around door and window moulds
- ✓ Flexible sealing of general household cavities and gaps
- ✓ Improving thermal and acoustic insulation

### Specifications

**Finish** Smooth uncut/aerated cut

**Maximum Crack/Hole Size**  
Build up holes >40mm in stages

**Skin Time**  
10 - 15 mins (23°C, 50% RH)

**Cure Time**  
18hrs (at 23°C), 24hrs (-5°C)

**Sandable** Yes (after 30 minutes)

**Area** Interior/exterior

**Product Chemistry**  
Polyurethane

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Timber
- ✓ Particleboard
- ✓ Concrete/Masonry/ Render / Bricks
- ✓ Cement Sheetting
- ✓ Steel inc. stainless
- ✓ Zinc/galvanised steel
- ✓ Aluminium
- ✓ Ceramic
- ✓ Plasterboard
- ✓ Polystyrene
- ✓ Coated Metals (pre-test)

### Available Products

### Colour

### Ctn Qty



**FulaFoam™ Pro Gun  
Low Expansion Foam  
750ml Can**  
Resource Code: 7200544161



green

12

## FulaFoam™ Cleaner

FulaFoam™ Cleaner is a solvent based cleaner for removing uncured polyurethane from applicator guns, tools and other surfaces. FulaFoam™ Cleaner can be used to clean applicator guns used for FulaFoam™ PRO Standard, FulaFoam™ Flexible and Max Bond PRO gun-applied foams and adhesives.



### Key Benefits

- ✓ Does not contain CFC's and H-CFC's
- ✓ Rapid cleaning of uncured polyurethane

### Uses

- ✓ Cleaning of HB Fuller applicator guns
- ✓ Clean up of excess foam or foam adhesive from tools and work surfaces, window frames, window sills, doors, door jambs etc

### Specifications

**Product Chemistry**  
Solvent

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Timber
- ✓ Metal
- ✓ Masonry
- ✓ Ceramics

### Available Products

### Colour

### Ctn Qty



**FulaFoam™ Cleaner  
500ml Can**  
Resource Code: 7319624021



clear

12

## FulaFill™ Building Filler Two Part Filler

FulaFill™ Building Filler is a two part polyester putty, designed to fill gaps and holes where movement is not expected. FulaFill™ Building Filler is designed for use by builders and tradespeople for a fast professional result.









### Key Benefits

- ✓ Fills gaps, cracks and holes in most common building materials
- ✓ Interior/exterior applications
- ✓ Sets rock hard, fast
- ✓ Will not shrink or slump
- ✓ Easy to sand and paint

### Uses

- ✓ Filling architraves and doors
- ✓ Filling furniture and timber
- ✓ Filling window frames and sashes

Specifications
<b>Finish</b> Fine
<b>Maximum Crack/Hole Size</b> Build up holes greater than 40mm in stages
<b>Gel Time</b> 6 mins
<b>Cure Time</b> 30 mins
<b>Sandable</b> Yes (after 30 minutes)
<b>Area</b> Interior/exterior
<b>Product Chemistry</b> Polyester
<b>Refer to TDS for additional technical information.</b>

Available Products	Colour	Ctn Qty
 <b>FulaFill™ Building Filler 500g Tin</b> Resource Code: 6025254084	 pink when mixed	8
 <b>FulaFill™ Building Filler 1kg Tin</b> Resource Code: 6025254106	 pink when mixed	8
 <b>FulaFill™ Building Filler 2kg Tin</b> Resource Code: 6025254013	 pink when mixed	4

Compatible Substrates
✓ Fibreglass
✓ Metal
✓ Cement sheeting
✓ Concrete
✓ MDF
✓ Timber
✓ Plasterboard
✓ Masonry
✓ Ceramic
✓ Particleboard



## FulaFill™ Heavy Duty Cracks and Holes Filler

For holes and cracks around the home up to 25mm FulaFill™ Heavy Duty Cracks and Holes Filler is the best product to use. It can be used indoors or outdoors on a variety of common household building surface as it cures to a hard, sandable finish. Once sanded you will be left with a smooth flawless look which can be easily painted over.



### Key Benefits







- ✓ Interior/exterior applications
- ✓ Paintable
- ✓ Smooth texture – ideal for internal walls
- ✓ One part – ready to use
- ✓ Sandable
- ✓ Minimal shrinkage during curing

### Uses

- ✓ Filling and patching large cracks, holes and gaps
- ✓ Providing a smooth surface over many substrates



For holes and cracks up to 25mm wide

Specifications	Available Products	Colour	Ctn Qty	Compatible Substrates
<b>Finish</b> Fine	 <b>FulaFill™ Heavy Duty Filler 260g Tub</b> Resource Code: 4147014238	 white	12	<ul style="list-style-type: none"> <li>✓ Brick</li> <li>✓ Concrete</li> <li>✓ Cement sheeting</li> <li>✓ Masonry</li> <li>✓ Timber</li> <li>✓ Particleboard</li> <li>✓ Plasterboard</li> </ul>
<b>Max. Crack/Hole Size</b> 25mm	 <b>FulaFill™ Heavy Duty Filler 600g Tub</b> Resource Code: 6031224137	 white	12	
<b>Skin Time</b> 30 mins, sandable time dependant on volume applied	 <b>FulaFill™ Heavy Duty Filler 1.2kg Tub</b> Resource Code: 4147014239	 white	6	
<b>Cure Time</b> 7 days full cure				
<b>Sandable</b> Yes				
<b>Paintable</b> Yes				
<b>Area</b> Interior/exterior				
<b>Product Chemistry</b> Acrylic				
<b>Refer to TDS for additional technical information.</b>				

## Fuller Trade™ Plumbing Silicone

Plumbing Silicone is a neutral cure water resistant sealant used to seal roof and gutter applications. Suitable for potable water, Plumbing Silicone is compatible with most substrates including: aluminium, steel, galvanised iron, plastics, glass, tiles, and terracotta.



NEW  
IN CATALOGUE

### Key Benefits

- ✓ For use with potable (drinking) water (AS4020)
- ✓ +/- 25% joint movement
- ✓ Interior/exterior applications
- ✓ Neutral cure
- ✓ Water resistant

### Uses

- ✓ Sheet metal and aluminium roofing applications
- ✓ Exterior cladding
- ✓ Guttering
- ✓ Flashing
- ✓ Downpipes

### Specifications

**Movement Capability (±)** 25%

**Potable Water Approved** Yes

**Mould & Mildew Resistant** No

**Skin Time**  
15 - 25 mins (23°C, 50% RH)

**Cure Time**  
2mm/day (23°C, 50% RH)

**Area** Interior/exterior

**Product Chemistry**  
Neutral cure silicone

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Steel inc. stainless
- ✓ Aluminium
- ✓ Zinc/galvanised steel
- ✓ Masonry
- ✓ Brick
- ✓ Ceramic
- ✓ Plasterboard
- ✓ Fibreglass
- ✓ Many plastics (pre-test)
- ✓ Glass
- ✓ Particleboard

### Available Products

### Colour

### Ctn Qty



**Fuller Trade™ Plumbing Silicone 300g Cartridge**  
Resource Code: 6004484224



translucent

20



**Fuller Trade™ Plumbing Silicone 400g Cartridge**  
Resource Code: 6033084246



grey

20

## Fuller Trade™ Wet Area Plumbing Silicone

Wet Area Plumbing Silicone is a neutral cure silicone sealant specifically designed for use in wet areas such as bathrooms and kitchens.



NEW  
IN CATALOGUE

### Key Benefits

- ✓ Contains fungicide that resists mould and mildew
- ✓ Neutral cure - Will not corrode metal or concrete
- ✓ Permanently flexible
- ✓ +/- 25% joint movement
- ✓ Primerless adhesion

### Uses

- ✓ Sealing around showers
- ✓ Sealing inside bath tubs
- ✓ Sealing around sinks
- ✓ Sealing and weather proofing sanitary ware and spas
- ✓ Suitable for wet areas

### Specifications

**Movement Capability (±)** 25%

**Potable Water Approved** No

**Mould & Mildew Resistant**  
Yes

**Skin Time**  
15 - 25 mins (23°C, 50% RH)

**Cure Time**  
2mm/day (23°C, 50% RH)

**Area** Interior/exterior

**Product Chemistry**  
Neutral cure silicone

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Aluminium
- ✓ Zinc/galvanised steel
- ✓ Masonry inc. brick
- ✓ Cement sheeting
- ✓ Ceramic
- ✓ Glass
- ✓ Fibreglass
- ✓ Timber
- ✓ Particleboard
- ✓ Plasterboard
- ✓ Many plastics (pre-test)

### Available Products

### Colour

### Ctn Qty



**Fuller Trade™ Wet Area Plumbing Silicone 300g Cartridge**  
Resource Code: 6009104220



white

20

## Fuller Trade™ Gap Filler

Gap Filler is a general purpose acrylic based gap filler. Suitable for most building substrates, it's easy to apply and cleans up with water.



### Key Benefits

- ✓ Remains flexible
- ✓ Easy to apply acrylic sealant
- ✓ Tools and finishes perfectly
- ✓ Paintable
- ✓ Interior/exterior use
- ✓ Resists slump and sag
- ✓ No mess – water clean up

### Uses

- ✓ Patching gaps around skirting boards, architraves, cornices, ceramic tiles (not in shower)
- ✓ Window frames prior to painting inside or outside
- ✓ General purpose fit out finishing

**Note:** Protect from water until sufficiently cured

### Specifications

**Finish** Fine

**Maximum Crack/Hole Size**  
25mm

**Skin Time**  
15 mins (23°C, 50% RH)

**Cure Time**  
Variable dependant on conditions

**Sandable** Yes

**Area** Interior/exterior

**Product Chemistry** Acrylic

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Brick
- ✓ Concrete
- ✓ Masonry
- ✓ Cement sheeting
- ✓ Plasterboard
- ✓ Aluminium
- ✓ Ceramic
- ✓ Timber\*\*
- ✓ Particleboard
- ✓ Polystyrene

\*\* not suitable for weatherboard

### Available Products

#### Colour

#### Ctn Qty



**Fuller Trade™ Gap Filler  
420g Cartridge**  
Resource Code: 6033734042



white

20

## Fuller Trade™ Construction Adhesive

Construction Adhesive is a multi-purpose adhesive ideal for bonding most common building materials. Construction Adhesive is compatible with most substrates including: concrete, masonry, metals, timber, plasterboard, and ceramic tiles.



### Key Benefits

- ✓ Repositionable for up to 20 mins after application
- ✓ High bond strength
- ✓ One part - no mixing
- ✓ Reduces squeaking associated with nail ride
- ✓ Paintable

### Uses

- ✓ Fitting wood panelling, fibre cement, plasterboard, plywood and strip flooring to wooden or metal framework
- ✓ Bonding skirting boards, architraves and trims to walls
- ✓ Installing timber wall panelling to timber and metal studs

### Specifications

**Movement Capability** N/A

**Service Temperature**  
0°C to 45°C

**Skin Time**  
2 - 5 mins (23°C, 50% RH)

**Cure Time**  
Variable dependant on conditions

**Area** Interior/exterior

**Product Chemistry**  
Solvent based rubber

**Refer to TDS for additional technical information.**

### Compatible Substrates

- ✓ Concrete
- ✓ Cement Sheet
- ✓ Masonry
- ✓ Metal
- ✓ Timber
- ✓ Particleboard
- ✓ Plywood
- ✓ Plasterboard
- ✓ Ceramic Tiles
- ✓ Fibreglass
- ✓ Glass

### Available Products

#### Colour

#### Ctn Qty



**Fuller Trade™ Construction  
Adhesive 300g Cartridge**  
Resource Code: 6033724011



brown

20

### Caulking Guns

H.B. Fuller caulking guns are engineered for trade using quality materials and components with performance and reliability in mind.



#### High Force Caulking Gun

- ✓ Suitable for 300ml cartridges
- ✓ 18:1 compression ratio - ideal for viscous products
- ✓ 5mm stroke
- ✓ Premium quality

Resource Code: 6073464094



#### Little Red Caulking Gun

- ✓ Suitable for 300ml cartridges
- ✓ Heavy duty - 12:1 compression ratio
- ✓ 7mm stroke
- ✓ Premium quality

Resource Code: 6034304015



#### Easy Squeeze Gun Yellow

- ✓ Suitable for 300ml cartridges
- ✓ Medium duty - 7:1 compression ratio
- ✓ 12mm stroke
- ✓ Skeleton type body with built-in puncture tool

Resource Code: 6031499000



#### Big Red Caulking Gun

- ✓ Suitable for 900g cartridges
- ✓ Heavy duty - 12:1 compression ratio
- ✓ 7mm stroke
- ✓ Premium quality

Resource Code: 6033124016



### Sausage Barrel Gun

- ✓ Suitable for 500ml & 600ml sausages
- ✓ Superior grade plunger rod and barrel
- ✓ Heavy duty clutch - 12:1 compression ratio
- ✓ 7mm stroke
- ✓ Includes 2 nozzles (Black for polyurethane & clear)

Resource Code: 6018714151



### Sausage Gun Nozzle - 10 Pack

- ✓ Suitable for all adhesive/sealants
- ✓ Easy to trim
- ✓ Supplied in pack of 10pcs

Resource Code: 6006224059




### Economy Foam Gun – Silver

- ✓ All metal applicator gun
- ✓ General purpose
- ✓ Compatible with Max Bond Pro Gun Adhesive, FulaFoam Pro Gun Applied Foam, FulaFoam Low Expansion Foam


Resource Code: 6035474365




### Joint Configuration

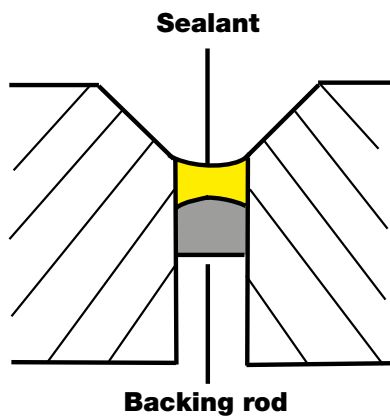


**Correct:** Sealant applied on backing rod using correct sealant dimensions

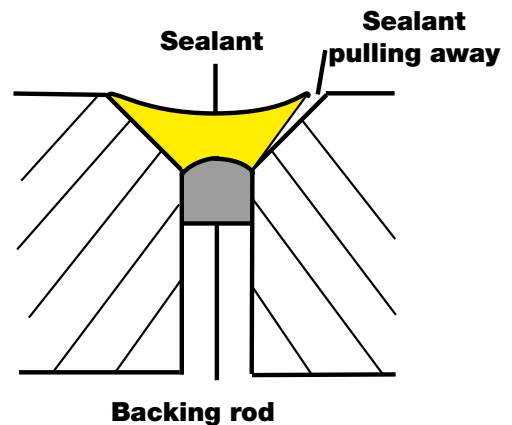


**Incorrect:** Sealant applied onto chamfered edge where concrete may be weak

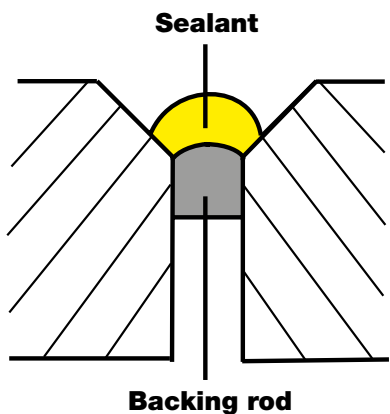


**Correct:** Alternative method of installation preserves ability of sealant to expand and contract

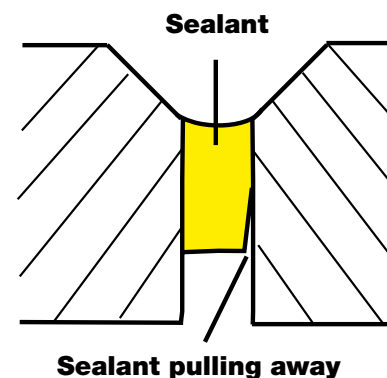

**Incorrect:** Sealant extends too deep into joint leading to tearing away from sides or splitting

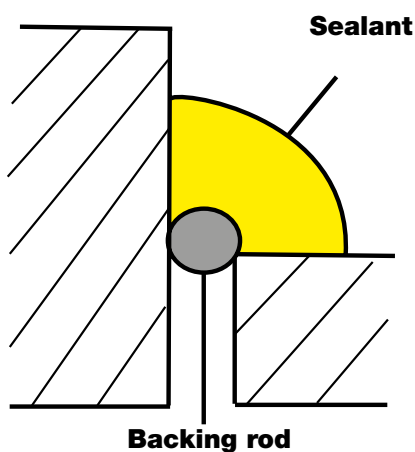

**Correct:** Sealant applied between two walls with backing rod to support movement

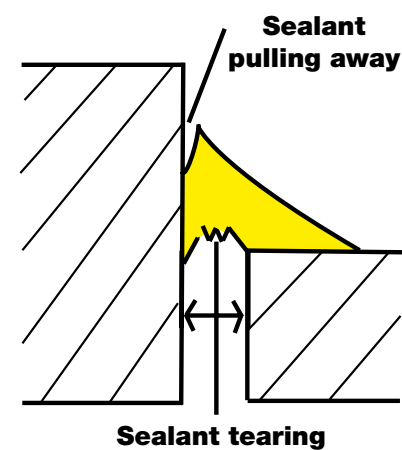

**Incorrect:** Sealant applied without backing rod or where excessive movement occurs, allows sealant to split away from the wall edges and tear

## Surface Preparation & Priming

- Ensure substrate surfaces are clean, sound, dry and free of oil, grease, dust, loose particles, release agents, silicone and water repellents. Priming, or alternatively solvent wiping, is necessary for joints involving some substrates. Please refer to individual product technical data sheets.

## Application Tips

- Care must be taken to select the correct sealant for the joint, taking into account requirements such as paintability, UV, temperature, chemical and water resistance, non-staining ability, joint movement capability, etc.
- Sealants should be applied between 5°C - 35°C ambient temperature.
- Sides of joints may be masked with tape prior to sealant application. If masking is undertaken, remove the tape before sealant cures.
- Wear appropriate clothing to avoid sealant contact with skin and eyes.
- Before sealant application, closed cell polyethylene or open cell polyurethane foam backing rod is usually pushed between the substrates to the joint depth, in order to control sealant depth forming the joint.
- In trafficable joints where firmer support is required, non-porous, semi-rigid backing rod type materials are sometimes recommended. Seek technical advice regarding the type of backing material and detailed instructions that need to be followed.
- Select a foam width where the foam will compress approx. 25% when pushed into the gap. Where closed cell foam is used, be careful not to puncture the surface, or over-compress the foam, as this can lead to gas from the foam bubbling into the sealant – a condition that worsens in warm conditions.
- In joints too shallow for backing rod, bond-breaker tape must be applied into the gap to avoid three-sided adhesion of the sealant, which will result in the joint failing.
- After applying sealant into the joint, the sealant should be smoothed (tooled), preferably without a release agent. If a tooling agent is required, check the technical data of the sealant to ensure suitability.
- Check the sealant technical data to ensure it is suitable for the proposed joint configuration.
- In standard expansion joints, the joint should be min 6mm width.
- For joints between 6mm and 10mm width, the depth of the sealant should be the same as the width (1:1).
- For joints between 10mm and 20mm width, the depth of the sealant should be 10mm.
- For joints between 20mm and 50mm width, the depth of the sealant should be half the joint width e.g. a 30mm width joint should have a depth of 15mm (1:2).
- Joints above 50mm are not standard, and technical advice should be sought.

Technical Data Sheets and Material Safety Data Sheets (referencing to product limitations) are available from our website: [www.hbfuller.com.au](http://www.hbfuller.com.au)

## Calculating Yield

Yield depends on a number factors including the gap width and depth and the shape of the bead. The tables (below) indicate nominal yield for a square joint for a 300ml cartridge or 600ml sausage.

Use the following formula to calculate yield in metres:

$$\text{Yield (m)} = \frac{\text{Cartridge (300ml) or Sausage (600ml) Volume}}{\text{Gap Width (mm) x Depth (mm)}}$$



Example:

$$\text{Yield 5m} = \frac{\text{300ml Cartridge}}{\text{8mm W x 8mm D}}$$

Nominal Yield for Joint in Metres per 300ml Cartridge								
		GAP WIDTH (mm)						
		6	8	10	15	20	25	30
DEPTH (mm)	6	8	6					
	8		5	4	2.5			
	10		4	3	2	1.5	1.25	
	12					1.25	1	0.8
	15							0.6

Nominal Yield for Joint in Metres per 600ml Sausage								
		GAP WIDTH (mm)						
		6	8	10	15	20	25	30
DEPTH (mm)	6	16	12					
	8		10	8	5			
	10		8	6	4	3	2.5	
	12					2.5	2	1.6
	15							1.3

# Selection Chart

-  Excellent performance
-  Possible to use  
(Pre-test or refer to TDS for limitations)

## Substrates

Aluminium

Concrete

Ceramic

Cement Sheet

Metal

Fibreglass

Particleboard

Brick

Masonry

Glass

Plasterboard

Plastic

Polystyrene

Paper/Fabric

Stainless Steel/Steel

Mirrors

Zinc/Galvanized Steel

Timber

### Adhesives

Max Bond™ Original

Max Bond™ Fast Grip

Max Bond™ Panel Grip

Max Bond™ Rapid Cure

Max Bond™ Pro Gun Adhesive

Max Bond™ PVA Adhesive

FulaPrene™ 303

Spray Bond™ Permanent

Rapid Grip™ Liquid

Rocor® Stud Adhesive

### Sealants

FulaFlex™ 550 PU LM

FulaFlex™ 570FC PU

FulaFlex™ 625 Hybrid

FulaFlex™ 650FC

FulaSeal™ Construction Joint Sealant

FulaSeal PRO™ 840NS Mastic

### Silicones

FulaSeal PRO™ 300 Premium Grade

FulaSeal PRO™ 660 High Performance

FulaSeal PRO™ 260 Heat Resistant RTV

FulaSeal PRO™ 730 RTV Adhesive Sealant

FulaSeal™ 700 Roof and Gutter

FulaSeal™ 705 Brick & Concrete

FulaSeal™ 710 Glass

FulaSeal™ 720 Paintable MS

FulaSeal™ 740 Bathroom & Kitchen

FulaSeal™ 750 Multi Purpose

FulaSeal™ 760 Glazing

FulaSeal™ 770 Sanitary

FulaSeal™ 780 Plumbing

FulaSeal™ 790 Mirror & Metal

### Flooring

Floor Bond™ XMS Sub-Floor

Floor Bond™ MC1

Floor Bond™ XMS

### Fire Rated

FulaFoam™ Fire Rated Expanding Foam

Firesound™

### Multi Use

Tool Box™ Original

Tool Box™ High Tack

Tool Box™ Invisible

701 FulaSeal™ Ultra Clear

711 FulaSeal™ Clear

### Caulk

Caulk in Colours™

### Fillers

FulaFill™ Gap Filler

FulaFoam™ Expanding Foam

FulaFoam™ Pro Gun Foam

FulaFoam™ Low Expansion Foam

FulaFill™ Building Filler

FulaFill™ Heavy Duty Filler

### Trade

Fuller Trade™ Plumbing Silicone

Fuller Trade™ Wet Area Silicone

Fuller Trade™ Gap Filler

Fuller Trade™ Construction Adhesive

Pg. 5

Pg. 6

Pg. 7

Pg. 8

Pg. 9

Pg. 10

Pg. 11

Pg. 12

Pg. 12

Pg. 13

Pg. 16

Pg. 17

Pg. 18

Pg. 19

Pg. 20

Pg. 21

Pg. 23

Pg. 24

Pg. 25

Pg. 25

Pg. 26

Pg. 27

Pg. 27

Pg. 28

Pg. 28

Pg. 29

Pg. 29

Pg. 30

Pg. 31

Pg. 32

Pg. 35

Pg. 36

Pg. 37

Pg. 39

Pg. 40

Pg. 43

Pg. 44

Pg. 44

Pg. 45

Pg. 45

Pg. 46

Pg. 49

Pg. 50

Pg. 50

Pg. 51

Pg. 52

Pg. 53

Pg. 54

Pg. 54

Pg. 55

Pg. 55

Technical											
Product Chemistry		Skin Time at 23°C, 50% RH		Specific Gravity		Cure time at 23°C, 50% RH		Movement Capability (+/-)		Hardness (Shore A)	
Clean Up		Service Temp (°C)		Paintable		Trafficable					
	Solvent based rubber	2 - 5 mins	~1.0	Variable dependant on conditions	N/A	N/A	Mineral turpentine or solvent	-10 to 50	Yes	N/A	Max Bond™ Original
	Acrylic	20 mins	~1.4	Variable dependant on conditions	N/A	N/A	Water	-5 to 90	Yes	N/A	Max Bond™ Fast Grip
	Solvent based rubber	1 - 5 mins	~1.0	Variable dependant on conditions	N/A	N/A	Mineral turpentine or solvent	0 to 50	Yes	N/A	Max Bond™ Panel Grip
	Polyurethane	20 mins	~1.1	1 hr clamping time, full cure 7 days	N/A	N/A	Mineral turpentine or solvent	-40 to 100	Yes	N/A	Max Bond™ Rapid Cure
	Polyurethane	20 - 30 mins	N/A	80% in 3 hrs, full cure in 24 hrs	N/A	N/A	Max Pro Cleaner or acetone	-40 to 90	Yes	N/A	Max Bond™ Pro Gun Adhesive
	Water based	15 mins	~1.0	24 hours	N/A	N/A	Mineral turpentine or solvent	0 to 70	Yes	N/A	Max Bond™ PVA Adhesive
	Solvent	2 - 5 mins	~1.0	Variable dependant on conditions	N/A	N/A	Solvent	-10 to 80	Yes	N/A	FulaPrene™ 303
	Solvent based rubber	2 - 5 mins	~1.0	2 hours	N/A	N/A	Mineral turpentine or solvent	0 to 45	Yes	N/A	Spray Bond™ Permanent
	Solvent	10 - 30 mins	<1.0	24 hours	N/A	N/A	Mineral turpentine or solvent	0 to 50	Yes	N/A	Rapid Grip™ Liquid
	Acrylic	30 mins	~1.4	Variable dependant on conditions	N/A	N/A	Water	-5 to 90	Yes	N/A	Racor® Stud Adhesive
	Polyurethane	40 mins	~1.3	3-4mm/day	35%	ca. 30	Mineral turpentine or solvent	N/A	Yes	No	FulaFlex™ 550 PU LM
	Polyurethane	50 mins	~1.3	4mm/day	25%	35-45	Mineral turpentine or solvent	N/A	Yes	Yes	FulaFlex™ 570FC PU
	Hybrid Polymer	30 - 40 mins	~1.5	>2mm/day	25%	25	Mineral turpentine or solvent	-40 to 100	Yes	No	FulaFlex™ 625 Hybrid
	Hybrid Polymer	15 - 25 mins	~1.5	2-3mm/day	15%	50	Mineral turpentine or solvent	-40 to 100	Yes	Yes	FulaFlex™ 650FC
	Acrylic	10 mins	~1.5	7 - 10 days	25%	35 - 40	Water	-5 to 90	Yes	No	FulaSeal™ Const. Joint Sealant
	Polybutene Mastic	N/A	~1.4	N/A	N/A	N/A	Mineral turpentine or solvent	-40 to 50	No	No	FulaSeal PRO™ 840NS Mastic
	Neutral cure silicone	10 - 15 mins	~1.0	2mm/day	20%	28	Mineral turpentine	-40 to 150	No	No	FulaSeal PRO™ 300 Prem. Grade
	Neutral cure silicone	10 - 15 mins	~1.0	1 - 2mm/day	25%	28	Mineral turpentine	-60 to 180	No	No	FulaSeal PRO™ 660 High Perf.
	Acetic cure silicone	15 - 20 mins	~1.0	3mm/day	25%	N/A	Mineral turpentine	-40 to 260	No	No	FulaSeal PRO™ 260 Heat Res. RTV
	Acetic cure silicone	15 - 20 mins	~1.0	3mm/day	25%	25	Mineral turpentine	-40 to 180	No	No	FulaSeal PRO™ 730 RTV
	Neutral cure silicone	10 - 15 mins	~1.4 (Gry), ~1.0 (Other)	2mm/day	25%	19 (Blk & Trans) 26 (Gry)	Mineral turpentine	-15 to 150	No	No	FulaSeal™ 700 Roof and Gutter
	Neutral cure silicone	7 - 10 mins	~1.3	2mm/day	25%	26	Mineral turpentine	-15 to 150	No	No	FulaSeal™ 705 Brick & Concrete
	Acetic cure silicone	15 - 20 mins	~1.0	2mm/day	15%	20	Mineral turpentine	-50 to 150	No	No	FulaSeal™ 710 Glass
	MS polymer	100 - 200 mins	~1.4	3 - 4mm/day	25%	25	Mineral turpentine	-40 to 100	Yes	No	FulaSeal™ 720 Paintable MS
	Acetic cure silicone	15 - 20 mins	~1.0	2mm/day	25%	20	Mineral turpentine	-50 to 150	No	No	FulaSeal™ 740 Bath & Kitchen
	Neutral cure silicone	7 - 10 mins	~1.0	2mm/day	25%	24	Mineral turpentine	-50 to 150	No	No	FulaSeal™ 750 Multi Purpose
	Neutral cure silicone	10 - 20 mins	~1.4	2mm/day	25%	26	Mineral turpentine	-50 to 150	No	No	FulaSeal™ 760 Glazing
	Neutral cure silicone	5 - 10 mins	~1.4	2mm/day	25%	26	Mineral turpentine or solvent	-50 to 150	No	No	FulaSeal™ 770 Sanitary
	Neutral cure silicone	10 - 15 mins	~1.4 (Gry), ~1.0 (Other)	2mm/day	25%	19 (Trans, Alumin) 26 (Gry)	Mineral turpentine or solvent	-50 to 150	No	No	FulaSeal™ 780 Plumbing
	Neutral cure silicone	7 - 15 mins	~1.0	2mm/day	25%	19	Mineral turpentine	-50 to 150	No	No	FulaSeal™ 790 Mirror & Metal
	Hybrid polymer	60 - 100 mins	~1.6	2mm/day	N/A	N/A	Mineral turpentine or solvent	-40 to 90	Yes	N/A	Floor Bond™ XMS Sub-Floor
	Water Based	20 mins	~1.3	7 days overcoat in 3 hours	N/A	N/A	Water	-40 to 90	Yes	N/A	Floor Bond™ MC1
	Hybrid polymer	60 - 100 mins	~1.6	2mm/day	N/A	N/A	Mineral turpentine or solvent	-40 to 90	Yes	N/A	Floor Bond™ XMS
	Polyurethane	12 - 16 mins	N/A	24 hours max.	N/A	N/A	Foam Cleaner or acetone	-50 to 90	Yes	No	FulaFoam™ Fire Rated Exp. Foam
	Acrylic	15 mins	~1.5	Variable dependant on conditions	20%	25 - 35	Water	-20 to 80	Yes	No	Firesound™
	MS polymer	10 - 15 mins	~1.5	2mm/day	20%	55	Mineral turpentine or solvent	-40 to 100	Yes	Yes	Tool Box™ Original
	Hybrid Polymer	20 mins	~1.5	3mm/day	20%	60	Mineral turpentine or solvent	-40 to 100	Yes	Yes	Tool Box™ High Tack
	Hybrid Polymer	10 - 15 mins	~1.0	2mm/day	20%	49	Mineral turpentine or solvent	-40 to 80	Yes	No	Tool Box™ Invisible
	Acrylic	10 - 20 mins	~1.0	Variable dependant on conditions	25%	10	Water	-5 to 80	Yes	No	701 FulaSeal™ Ultra Clear
	Copolymer	5 mins	0.9	Dependant on conditions/7 days	25%	N/A	Mineral turpentine or solvent	0 to 50	Yes	No	711 FulaSeal™ Clear
	Acrylic	10 mins	~1.6	Variable dependant on conditions	20%	ca. 40	Water	-5 to 80	Yes	No	Caulk in Colours™
	Acrylic	15 mins	~1.6	Variable dependant on conditions	10%	N/A	Water	-5 to 80	Yes	No	FulaFill™ Gap Filler
	Polyurethane	10 - 15 mins	N/A	80% in 2 hrs, full cure in 24 hrs	N/A	N/A	Foam Cleaner or acetone	-40 to 90	Yes	No	FulaFoam™ Expanding Foam
	Polyurethane	10 - 15 mins	N/A	80% in 2 hrs, full cure in 24 hrs	N/A	N/A	Foam Cleaner or acetone	-40 to 90	Yes	No	FulaFoam™ Pro Gun Foam
	Polyurethane	10 - 15 mins	N/A	80% in 2 hrs, full cure in 24 hrs	N/A	N/A	Foam Cleaner or acetone	-40 to 90	Yes	No	FulaFoam™ Low Exp. Foam
	Polyester	6 mins	~1.0	30 mins	N/A	Shore D 65	Acetone	0 to 80	Yes	N/A	FulaFill™ Building Filler
	Acrylic	30 mins	1.7	7 days	N/A	ca. 80	Water	0 to 80	Yes	No	FulaFill™ Heavy Duty Filler
	Neutral Cure Silicone	15 - 25 mins	1.0 (Trns), 1.4 (Gry)	2mm/day	25%	19 (Trans), 25 (Grey)	Mineral turpentine or solvent	-50 to 150	No	No	Fuller Trade™ Plumbing Silicone
	Neutral Cure Silicone	15 - 25 mins	~1.0	2mm/day	20%	26	Mineral turpentine or solvent	-50 to 150	No	No	Fuller Trade™ Wet Area Silicone
	Acrylic	15 mins	~1.6	Variable dependant on conditions	10%	N/A	Water	-5 to 80	Yes	No	Fuller Trade™ Gap Filler
	Solvent Based Rubber	2 - 5 mins	~1.1	Variable dependant on conditions	N/A	N/A	Mineral turpentine or solvent	0 to 45	Yes	No	Fuller Trade™ Const. Adhesive

## Notes

[illegible]



[illegible]



# H.B. Fuller

---

**GETS THE JOB DONE**

**H.B. Fuller Company Australia Pty Ltd**  
16-22 Redgum Drive Dandenong South Vic 3175  
**Ph:** 1800 423 855 **Fx:** 1800 420 055  
**Em:** [customer.service@hbfuller.com](mailto:customer.service@hbfuller.com)  
**Wb:** [www.hbfuller.com.au](http://www.hbfuller.com.au)